

# DS939 Panoramic Detector

www.boschsecurity.com



**BOSCH**  
Invented for life



- ▶ Up to 7.6 m (25 ft) mounting height
- ▶ Fully adjustable optics for coverage integrity and customization
- ▶ Hinged chassis and base plate for easy installation
- ▶ High efficiency LED and light pipe system for easy walk testing
- ▶ First Step Processing (FSP)

The ceiling mount DS939 PIR Detector provides a 21 m (70 ft) panoramic coverage pattern and can be used on ceilings as high as 7.6 m (25 ft). With three separate PIR sections that are fully adjustable, the DS939 provides coverage integrity at all mounting heights, plus the ability to customize the coverage for specific areas. The DS939 uses several patented processing techniques to provide excellent catch performance with freedom from false alarms.

## Functions

### Signal Processing

Uses passive infrared technologies to provide an alarm condition when the field of protection is activated. Alarm signals must meet the signaling requirements to activate an alarm.

### First Step Processing

First Step Processing (FSP) allows virtually instant response to human targets without sacrificing false alarm immunity to other sources. By adjusting its sensitivity based upon signal amplitude, polarity, slope and timing, FSP eliminates the need for the installer to select the sensitivity level for the application. Each sensor is processed individually and both must agree there is an alarm before the alarm relay is activated.

## Test Features

- High efficiency LED and light-pipe system provide walk test indication that is easily viewable from any angle and at any mounting height.
- Alarm memory feature allows detector to latch the alarm LED to aid in response.
- Remote LED walk-test control allows the LED to be enabled or disabled using a switched input without accessing the detector.


## Certifications and approvals

Europe Complies with EN50131-1, Grade 2


Region	Certification
Europe	CE 89/336/EEC, EN55022: 1998 +A1: 2000 +A2: 2003, EN50130-4: 1996 +A1: 1998 +A2: 2003, EN61000-4-2: 1995 +A1: 1998 +A2: 2001, EN61000-4-3: 2002 +A1: 2003, EN61000-4-4: 1995 +A1: 2000 +A2: 2001, EN61000-4-5: 1995 +A1: 2001, EN61000-4-6: 1996 +A1: 2001 +A2: 2001, EN61000-4-11: 1994 +A1: 2001, EN60950-1: 2001 +A11: 2004
	CE 2004/108/EC; EN 50130-4: 1996 +A1: 1998 +A2: 2003; EN 60950-1: 2006

Region	Certification	
	EN50131-1	EN 50131-2-2 [DS939]
USA	UL	ANSR: Intrusion Detection Units (UL639), ANSR7: Intrusion Detection Units Certified for Canada (cULus)
France	AFNOR	2620200007A0 [DS939]
China	CCC	2009031901000548
Sweden	INTYG	15-476 Alarm Class 1/2, Environmental Class II (Larmklass 1/2 miljöklass II enligt)

**Installation/configuration notes**

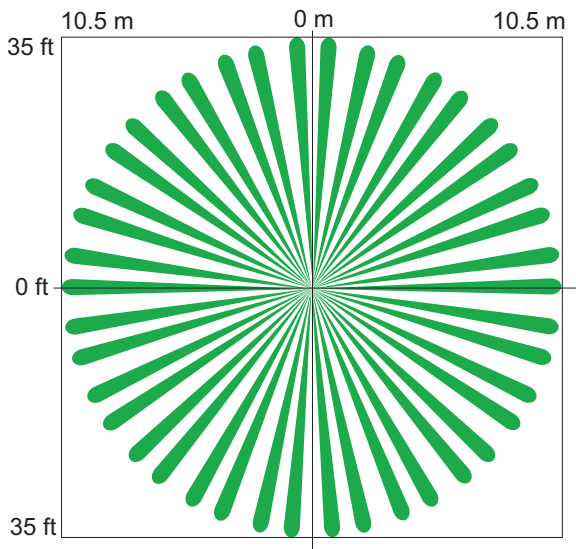

**Top View**

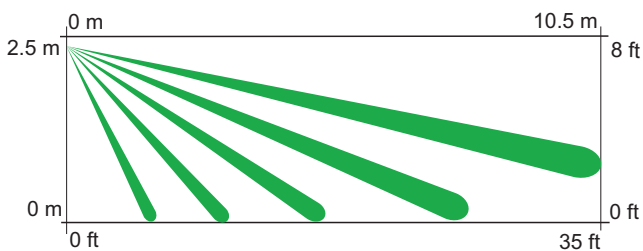

**Side View**

**Coverage Information**

Coverage is 360° x 21 m (70 ft) diameter when the detector is mounted 3.7 to 7.6 m (12 ft to 25 ft). Coverage is 15 m (50 ft) diameter when the detector is mounted at 3 m (10 ft). Coverage is 12 m (40 ft) when the detector is mounted at 2.4 m (8 ft). Pattern consists of 69 zones in 21 barriers. Each barrier is 11 m (35 ft) long and 1.5 m (5 ft) wide at 11 m (35 ft). The barriers are grouped into three groups of seven barriers each. Each group has vertical adjustment for customized coverage.

**Technical specifications**

**Enclosure Design**

Properties:	Modular chassis and hinged mounting base design provide easy access to field setup switches and wiring.
Dimensions:	8.9 cm x 17.8 cm (3.5 in. x 7 in.)

**Environmental Considerations**

Operating Temperature:	-40°C to +49°C (-40°F to +120°F) <i>For UL Certified installations, 0°C to +49°C (+32°F to +120°F)</i>
Sensitivity:	Low/High gain settings
Complies with Environmental Class II (EN50130-5)	

**Mounting**

Height Range:	3 m to 7.6 m (8 ft to 25 ft) recommended
Location:	Mounts directly to ceiling or to standard 10.2 cm (4 in.) octagonal electrical box.
Internal Pointability:	Coverage is adjustable ±10° horizontally, +2° to -18° vertically.

**Outputs**

Alarm Relay:	Silent-operating form C relay. Contacts rated 125 mA, 28 VDC, 3 W maximum for DC resistive loads.
Tamper:	Normally-closed (with cover in place) tamper switch. A wall (base) tamper is included. Contacts rated at 28 VDC, 125 mA, 3 W maximum.

**Power Requirements**

Current:	12 mA standby; 39 mA in alarm with LEDs enabled
Voltage:	9 VDC to 15 VDC

**Ordering information**

**DS939 Panoramic Detector**

Provides a 21 m (70 ft) panoramic coverage pattern and can be used on ceilings as high as 7.6 m (25 ft). Order number **DS939**

**Represented by:**

**North America:**

Bosch Security Systems, Inc.  
130 Perinton Parkway  
Fairport, New York, 14450, USA  
Phone: +1 800 289 0096  
Fax: +1 585 223 9180  
security.sales@us.bosch.com  
www.boschsecurity.us

**Europe, Middle East, Africa:**

Bosch Security Systems B.V.  
P.O. Box 80002  
5617 BA Eindhoven, The Netherlands  
Phone: + 31 40 2577 284  
Fax: +31 40 2577 330  
emea.securitysystems@bosch.com  
www.boschsecurity.com

**Asia-Pacific:**

Robert Bosch (SEA) Pte Ltd, Security  
Systems  
11 Bishan Street 21  
Singapore 573943  
Phone: +65 6571 2808  
Fax: +65 6571 2699  
apr.securitysystems@bosch.com  
www.boschsecurity.asia

**China:**

Bosch (Shanghai) Security Systems Ltd.  
203 Building, No. 333 Fuquan Road  
North IBP  
Changning District, Shanghai  
200335 China  
Phone +86 21 22181111  
Fax: +86 21 22182398  
www.boschsecurity.com.cn

**Latin America and Caribbean:**

Robert Bosch Ltda Security Systems Division  
Via Anhanguera, Km 98  
CEP 13065-900  
Campinas, Sao Paulo, Brazil  
Phone: +55 19 2103 2860  
Fax: +55 19 2103 2862  
latam.boschsecurity@bosch.com  
www.boschsecurity.com