


# F220-B6 Conventional Detector Bases

www.boschsecurity.com



**BOSCH**  
Invented for life

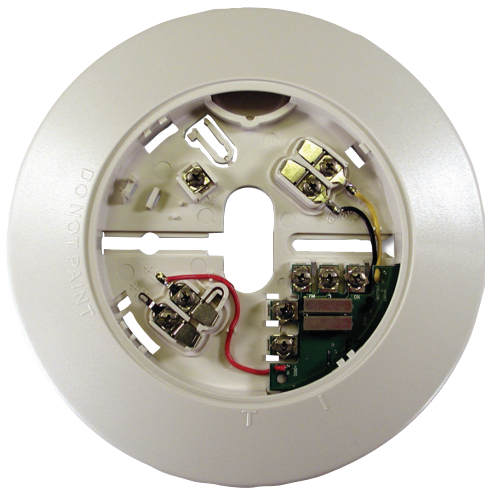

- ▶ Easy installation
- ▶ Interchangeable detector heads
- ▶ UL listed when used with a detector from the F220 family

The F220-B6 Detector Bases work with the F220 Photoelectric Smoke and Heat Detectors. The F220-B6 is a 12 V or 24 V base for two-wire loops. The other bases in this family are 12 V or 24 V bases for four-wire loops.

## Certifications and approvals

Region	Certification	
USA	UL	UQGS: Heat - Automatic Fire Detectors (UL521), UROX: Smoke - Automatic Fire Detectors (UL268), UROX7: Smoke - Automatic Fire Detectors Certified for Canada (CAN/ULC-S529)
	FM	F220-B6 Family
	CSFM	see our website
	NYC-MEA	(117-05-E)
	MSFM	permit #2200 Sep 2008
Hong Kong	HKFSD	J-002/C/067

## Installation/configuration notes

### Compatibility Information

**Two-wire:** Bosch Security Systems, Inc. makes no claim written, oral, or implied that the F220-B6 Detector Bases work with any two-wire control panels except those specified in the Two-wire Detector/Control Panel Compatibility List Technical Service Note (P/N: 4998148185).

**Four-wire:** Compatible with all UL Listed four-wire control panels. Refer to the control panel's Installation Instructions for proper end-of-line (EOL) resistor selection.

**Detectors:** Compatible with the following F220 Series Detector Heads:

- F220-P Photoelectric Smoke Detector
- F220-PTH Photoelectric Smoke Detector with +135°F (+57°C) Heat Sensor
- F220-PTHC<sup>1</sup> Photoelectric Smoke Detector with +135°F (+57°C) Heat Sensor and Carbon Monoxide Sensor Enhancement<sup>1</sup>
- F220-135 Electronic Rate-of-Rise, Fixed Temperature +135°F (+57°C) Heat Detector
- F220-135F Electronic Fixed Temperature +135°F (+57°C) Heat Detector
- F220-190F Electronic Fixed Temperature +190°F (+88°C) Heat Detector

<sup>1</sup> The F220-PTHC detects carbon monoxide (CO) as a component of a fire. It is not a CO detector and cannot activate an alarm in the presence of CO only.

### Mounting Considerations

Depending on local regulations, surface mount the bases using anchors, mollies, or wing nuts; or mount the bases directly on four-inch square or octagonal electrical boxes or single-gang switch boxes.



### Notice

The electrical box must be large enough to accommodate the number and size of conductors specified by the National Electrical Code or any local authorities having jurisdiction (AHJ).

### Wiring Considerations

In a two-wire system, the maximum loop length depends on the number of detector bases on the loop, the wire size, and the control panel specifications. Refer to the control panel's installation instructions for specific wiring information.

In a four-wire system, the maximum loop length and number of bases that can be placed on a loop depend on the voltage drop on the power circuit. Use standard voltage drop calculations to ensure that the last detector on the loop has at least 10 V.

### F220-B6C 12/24 VDC Four-wire Base with Auxiliary Form C Relay

Four-wire base with a normally-open (NO) alarm loop relay and a set of auxiliary contacts (Form C).

Order number **F220-B6C**

### F220-B6E 12/24 VDC Four-wire Power Supervision Base with End-of-line Power Monitoring Relay

Four-wire base with a normally-open (NO) alarm relay and an EOL power supervision relay.

Order number **F220-B6E**

## Parts included

Quant.	Component
1	Detector base
1	Literature pack

## Technical specifications

### Environmental

Relative Humidity:	Up to 95%, non-condensing
Temperature (operating):	+32°F to +100°F (0°C to +38°C)

### Mechanical

Color:	Off-white
Dimensions (diameter x D)	6 in. x 0.9 in. (15.2 cm x 2.3 cm)
Material:	Fire-resistant plastic

## Ordering information

### F220-B6 12/24 VDC Two-wire Base

Standard base for two-wire (12 VDC or 24 VDC system) applications.

Order number **F220-B6**

### F220-B6R Standard 12/24 VDC Four-wire Base

Standard base for four-wire (12 VDC or 24 VDC) detector systems.

Order number **F220-B6R**

**Represented by:**

**Americas:**

Bosch Security Systems, Inc.  
130 Perinton Parkway  
Fairport, New York, 14450, USA  
Phone: +1 800 289 0096  
Fax: +1 585 223 9180  
security.sales@us.bosch.com  
www.boschsecurity.us

**Europe, Middle East, Africa:**

Bosch Security Systems B.V.  
P.O. Box 80002  
5617 BA Eindhoven, The Netherlands  
Phone: + 31 40 2577 284  
Fax: +31 40 2577 330  
emea.securitysystems@bosch.com  
www.boschsecurity.com

**Asia-Pacific:**

Robert Bosch (SEA) Pte Ltd, Security  
Systems  
11 Bishan Street 21  
Singapore 573943  
Phone: +65 6571 2808  
Fax: +65 6571 2699  
apr.securitysystems@bosch.com  
www.boschsecurity.asia

**China:**

Bosch (Shanghai) Security Systems Ltd.  
201 Building, No. 333 Fuquan Road  
North IBP  
Changning District, Shanghai  
200335 China  
Phone +86 21 22181111  
Fax: +86 21 22182398  
www.boschsecurity.com.cn

**America Latina:**

Robert Bosch Ltda Security Systems Division  
Via Anhanguera, Km 98  
CEP 13065-900  
Campinas, Sao Paulo, Brazil  
Phone: +55 19 2103 2860  
Fax: +55 19 2103 2862  
latam.boschsecurity@bosch.com  
www.boschsecurity.com