

# Blue Line Gen2 TriTech Motion Detectors

www.boschsecurity.com



**BOSCH**

Invented for life



- ▶ Pet-friendly Selectable model available – optimize installation for pet (45 kg [100 lb]) and non-pet applications
- ▶ Dynamic Temperature Compensation – superior catch performance in any environment
- ▶ Microwave Noise Adaptive processing – reduce false alarms from repetitive sources
- ▶ Wall to Wall Coverage – superior catch performance
- ▶ Flexible Mounting Height, No Adjustments – reduce installation time and false alarms, improve catch performance

The Blue Line Gen2 TriTech Motion Detectors (ISC-BDL2) use a combination of passive infrared (PIR) and microwave detection technologies with advanced signal processing. The pet-friendly (-WP) models generate alarms for human intruders without generating false alarms for pets. These small unobtrusive detectors are simple to install and do not need field adjustments.

## Functions

### First Step Processing (FSP)

*First Step Processing (FSP)* almost instantly responds to human targets without producing false alarms from other sources. FSP adjusts the detector's sensitivity based on signal amplitude, polarity, slope, and timing. This eliminates the need for the installer to select the sensitivity level, thus improving ease of installation and reliability.

### Pet-friendly Selectivity (-WP models only)

The installer can turn pet immunity on or off based upon application requirements. When pet immunity is turned off, the detector provides superior catch performance identical to the non-pet models. When pet immunity is turned on, the detector can

distinguish between signals caused by humans and signals caused by pets. It ignores signals caused by one or two pets up to 45 kg (100 lb) or numerous rodents.

### Microwave Noise Adaptive Processing

*Microwave Noise Adaptive Processing* adjusts to background disturbances, reducing false alarms without sacrificing intruder detection.

### Dynamic Temperature Compensation

The detector intelligently adjusts its sensitivity so that it can identify human intruders at virtually any temperature.

### Wall-to-Wall Coverage

An improved lookdown zone and coverage range of 12 m x 12 m (40 ft x 40 ft) provide wall-to-wall coverage.

### Self-locking Enclosure

The sliding self-locking enclosure has an integrated bubble level and custom gap-free, lift-gate style terminal blocks to make installation easier.

**Sealed Optics and Electronics**

The optics and electronics are assembled into the front enclosure and sealed with a protective cover to prevent damage during installation. The sealed optical chamber also prevents drafts and insects from affecting the detector.

**Test Features**

Externally visible alarm LED can be disabled after installation.

**Certifications and approvals**

These detectors are also designed to comply with the following:


- Europe Complies with EN50131-2-4 Grade 2
- Complies with EN50130-5 Class II
- Complies with EN60529, EN50102 (IP30, IK04)
- Complies with Directive 2002/95/EC - Restriction of the use of certain Hazardous Substances (RoHS)
- China Complies with CCC GB10408.1 and GB10408.9

| Region  | Certification  |
|---------|--|
|         | GODKJENNELSESBEVIS [-WP6, -W12, -WP12]                               |
| Europe  | CE ISC-BDL2-WP12H, ISC-BDL2-W12H                                     |
|         | CE ISC-BDL2-WP6G, ISC-BDL2-WP12G, ISC-BDL2-W12G                      |
|         | EN50131 ISC-BDL2-W12G  |
|         | EN50131 ISC-BDL2-W12H  |
|         | EN50131 ISC-BDL2-WP12G   |
|         | EN50131 ISC-BDL2-WP12H   |
|         | EN50131 ISC-BDL2-WP6G  |
| Belgium | INCERT ISC-BDL2-W12G, ISC-BDL2-WP12G, ISC-BDL2-WP6G                  |
|         | INCERT ISC-PDL1-W18G, ISC-PDL1-WC30G, ISC-PDL1-WA18x; ISC-BDL2-WP12G |
| USA     | UL ISC-BDL2-W12G, ISC-BDL2-WP12G, ISC-BDL2-WP6G                      |
|         | UL UL 639 - Standard for Intrusion Detection Units                   |
|         | FCC ISC-BDL2-W12G, ISC-BDL2-WP12G, ISC-BDL2-WP6G                     |
| Canada  | ULC ULC-S306-03 - Canadian Standard for Intrusion Detection Units    |
|         | IC ISC-BDL2-W12G, ISC-BDL2-WP12G, ISC-BDL2-WP6G                      |
| France  | AFNOR ISC-BDL2-W12G  |
|         | AFNOR ISC-BDL2-W12H  |


| Region          | Certification   |
|-----------------|---|
|                 | AFNOR ISC-BDL2-WP12G  |
|                 | AFNOR ISC-BDL2-WP12H  |
|                 | AFNOR ISC-BDL2-WP6G   |
| China           | CCC 2010031901000323 [-CHI]   |
| Sweden          | INTYG ISC-BDL2-W12G   |
|                 | INTYG ISC-BDL2-WP12G  |
|                 | INTYG ISC-BDL2-WP6G   |
| Brazil          | ANATEL ISC-BDL2-W12G, ISC-BDL2-WP12G, ISC-BDL2-WP6G   |
| the Netherlands | NCP ISC-BPR2-W12, ISC-BPR2-WP12, ISC-BPQ2-W12, ISC-BDL2-W12G, ISC-BDL2-WP12G, ISC-BDL2-WP6G |

**Installation/configuration notes**

**Coverage Patterns**

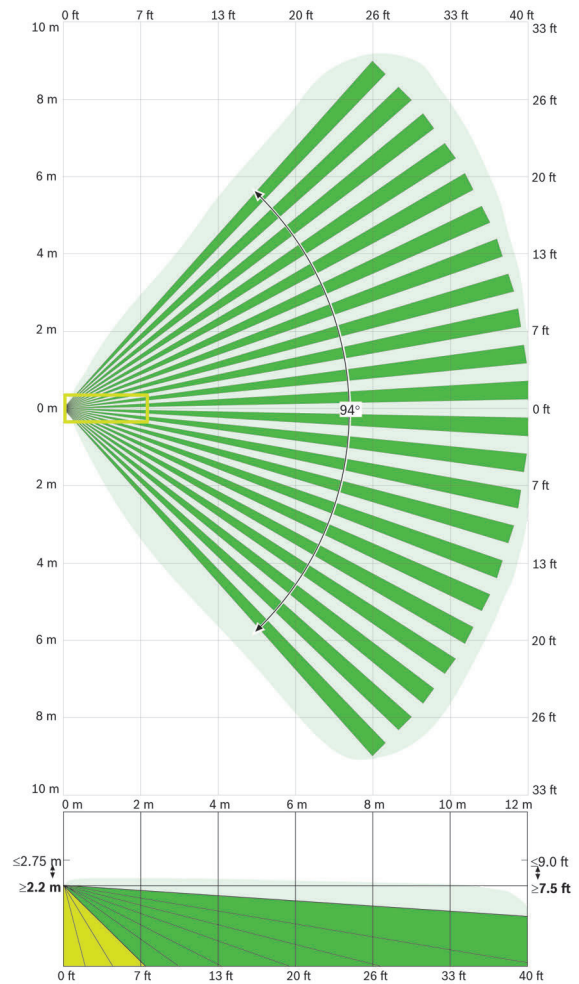

12 m x 12 m (40 ft x 40 ft) coverage

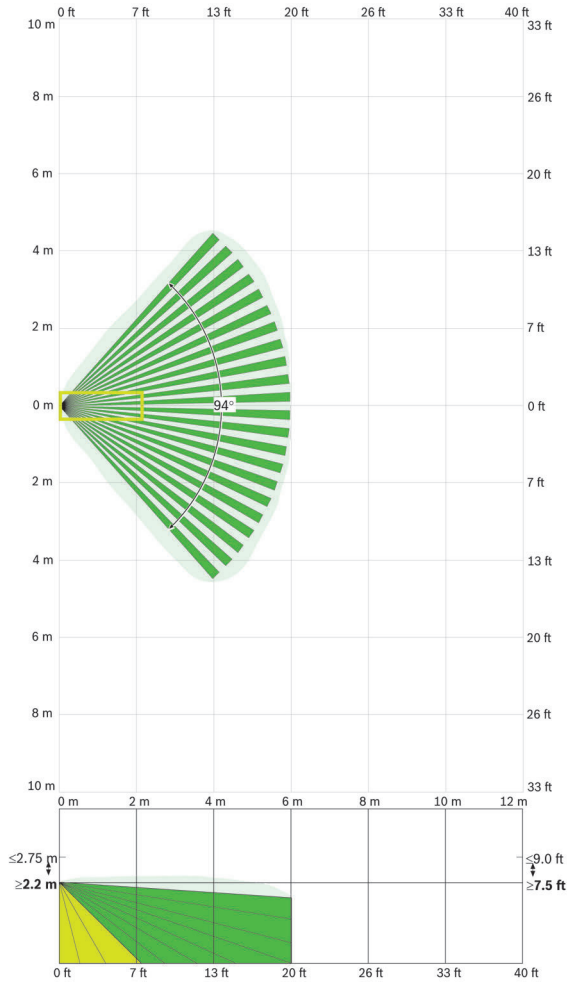

6 m x 6 m (20 ft x 20 ft) coverage (ISC-BDL2-WP6G, ISC-BDL2-WP6G-CHI)

### Mounting

The recommended mounting height is 2.2 m to 2.75 m (7.5 ft to 9 ft) with no adjustments required. Mount the motion detector level, both horizontally and vertically.

Mounting options:

- On a flat wall (surface, semi-flush), with the optional B335-3 Swiveling low-profile mount, or with the optional B328 Gimbal-mount Bracket
- In a corner (the junction of two perpendicular walls)
- On the ceiling with the optional B338 Universal Ceiling-mount Bracket

### Parts included

| Quant. | Component  |
|--------|--|
| 1      | Detector   |
| 1      | Hardware pack <ul style="list-style-type: none"> <li>• 2 anchors (#6, #8 x 7/8)</li> <li>• 2 screws (#6 x 1.25)</li> <li>• 1 cable tie (2.5 mm)</li> </ul> |
| 1      | Literature - Installation Guide  |

### Technical specifications

#### Electrical

|                          |                 |
|--------------------------|-----------------|
| Current (alarm/standby): | 10 mA at 12 VDC |
| Voltage (operating):     | 9 VDC to 15 VDC |

#### Environmental

|                             |  |
|-----------------------------|--|
| Environment                 | Complies with EN50130-5 Class II   |
| Pet Immunity <sup>1</sup> : | One or two pets up to 45 kg (100 lb) or numerous rodents   |
| Relative Humidity:          | 0 to 95%, non-condensing<br><i>For UL Listed product installations, 0 to 85%, non-condensing</i>               |
| Temperature (operating):    | -30°C to +55°C (-20°F to +130°F)<br><i>For UL Listed product installations, 0°C to +49°C (+32°F to +120°F)</i> |

<sup>1</sup> Applies to the Pet Friendly models only and only when the Pet Immunity feature is turned on.

#### Mechanical

|   |   |
|---|---|
| Color:                                      | white   |
| Dimensions:                                 | 105 mm x 61 mm x 44 mm<br>(4.2 in. x 2.4 in. x 1.7 in.)   |
| Material:                                   | High-impact ABS plastic   |
| Radio Frequency Interference (RFI) Immunity | No alarm or setup on critical frequencies in the range from 150 kHz to 2 GHz at field strengths less than 30 V/m. |

#### Outputs

|         |   |
|---------|---|
| Relay:  | Solid state, supervised, Form A normally-closed (NC) contacts rated for ≤100 mA, 25 VDC, 2.5 W, <20 Ω closed                            |
| Tamper: | Normally-closed (NC) contacts (with cover on) rated for ≤100 mA, 25 VDC, 2.5 W<br>Connect tamper circuit to 24-hour protection circuit. |

### Ordering information

#### ISC-BDL2-W12G Blue Line Gen 2 TriTech Motion Detector

Provides PIR and microwave, 12 m x 12 m (40 ft x 40 ft) coverage. Frequency: 10.525 GHz  
Order number **ISC-BDL2-W12G**

#### B328 Gimbal-mount Bracket

Mounts on a single-gang box and allows rotation of a detector. Wires are hidden inside.  
Order number **B328**

#### B335-3 Swiveling low-profile mount

Swiveling, low-profile, universal bracket for wall mounting. The vertical swivel range is +10° to -20°, while the horizontal swivel range is ±25°.  
Order number **B335-3**

**B338 Universal Ceiling-mount Bracket**

Swiveling universal bracket for ceiling mounting. The vertical swivel range is +7° to -16°, while the horizontal swivel range is ±45°.

Order number **B338**

**ISC-BDL2-W12H Blue Line Gen2 TriTech Motion Detector**

Provides PIR and microwave, 12 m x 12 m (40 ft x 40 ft) coverage. For use in France and the United Kingdom. Frequency: 10.588 GHz

Order number **ISC-BDL2-W12H**

**B328 Gimbal-mount Bracket**

Mounts on a single-gang box and allows rotation of a detector. Wires are hidden inside.

Order number **B328**

**B335-3 Swiveling low-profile mount**

Swiveling, low-profile, universal bracket for wall mounting. The vertical swivel range is +10° to -20°, while the horizontal swivel range is ±25°.

Order number **B335-3**

**B338 Universal Ceiling-mount Bracket**

Swiveling universal bracket for ceiling mounting. The vertical swivel range is +7° to -16°, while the horizontal swivel range is ±45°.

Order number **B338**

**ISC-BDL2-WP6G Blue Line Gen2 Pet Friendly TriTech Motion Detector**

Provides Pet Friendly PIR and microwave, 6 m x 6 m (20 ft x 20 ft) coverage. Frequency: 10.525 GHz

Order number **ISC-BDL2-WP6G**

**B328 Gimbal-mount Bracket**

Mounts on a single-gang box and allows rotation of a detector. Wires are hidden inside.

Order number **B328**

**B335-3 Swiveling low-profile mount**

Swiveling, low-profile, universal bracket for wall mounting. The vertical swivel range is +10° to -20°, while the horizontal swivel range is ±25°.

Order number **B335-3**

**B338 Universal Ceiling-mount Bracket**

Swiveling universal bracket for ceiling mounting. The vertical swivel range is +7° to -16°, while the horizontal swivel range is ±45°.

Order number **B338**

**ISC-BDL2-WP12G Blue Line Gen2 Pet Friendly TriTech Motion Detector**

Provides Pet Friendly PIR and microwave, 12 m x 12 m (40 ft x 40 ft) coverage. Frequency: 10.525 GHz

Order number **ISC-BDL2-WP12G**

**B328 Gimbal-mount Bracket**

Mounts on a single-gang box and allows rotation of a detector. Wires are hidden inside.

Order number **B328**

**B335-3 Swiveling low-profile mount**

Swiveling, low-profile, universal bracket for wall mounting. The vertical swivel range is +10° to -20°, while the horizontal swivel range is ±25°.

Order number **B335-3**

**B338 Universal Ceiling-mount Bracket**

Swiveling universal bracket for ceiling mounting. The vertical swivel range is +7° to -16°, while the horizontal swivel range is ±45°.

Order number **B338**

**ISC-BDL2-WP12H Blue Line Gen2 Pet Friendly TriTech Motion Detector**

Provides Pet Friendly PIR and microwave, 12 m x 12 m (40 ft x 40 ft) coverage. For use in France and the United Kingdom. Frequency: 10.588 GHz

Order number **ISC-BDL2-WP12H**

**B328 Gimbal-mount Bracket**

Mounts on a single-gang box and allows rotation of a detector. Wires are hidden inside.

Order number **B328**

**B335-3 Swiveling low-profile mount**

Swiveling, low-profile, universal bracket for wall mounting. The vertical swivel range is +10° to -20°, while the horizontal swivel range is ±25°.

Order number **B335-3**

**B338 Universal Ceiling-mount Bracket**

Swiveling universal bracket for ceiling mounting. The vertical swivel range is +7° to -16°, while the horizontal swivel range is ±45°.

Order number **B338**

**ISC-BDL2-WP6G-CHI Blue Line Gen2 Pet Friendly Tri-Tech Motion Detector**

Provides Pet Friendly PIR and microwave, 6 m x 6 m (20 ft x 20 ft) coverage. For use in China. Frequency: 10.525 GHz

Order number **ISC-BDL2-WP6G-CHI**

**ISC-BDL2-WP12G-CHI Blue Line Gen2 Pet Friendly Tri-Tech Motion Detector**

Provides Pet Friendly PIR and microwave, 12 m x 12 m (40 ft x 40 ft) coverage. For use in China. Frequency: 10.525 GHz

Order number **ISC-BDL2-WP12G-CHI**

**B328 Gimbal-mount Bracket**

Mounts on a single-gang box and allows rotation of a detector. Wires are hidden inside.

Order number **B328**

**B335-3 Swiveling low-profile mount**

Swiveling, low-profile, universal bracket for wall mounting. The vertical swivel range is +10° to -20°, while the horizontal swivel range is ±25°.

Order number **B335-3**

**B338 Universal Ceiling-mount Bracket**

Swiveling universal bracket for ceiling mounting. The vertical swivel range is +7° to -16°, while the horizontal swivel range is ±45°.

Order number **B338**

---

**Accessories**

**B328 Gimbal-mount Bracket**

Mounts on a single-gang box and allows rotation of a detector. Wires are hidden inside.

Order number **B328**

---

**B335-3 Swiveling low-profile mount**

Swiveling, low-profile, universal bracket for wall mounting. The vertical swivel range is +10° to -20°, while the horizontal swivel range is ±25°.

Order number **B335-3**

---

**B338 Universal Ceiling-mount Bracket**

Swiveling universal bracket for ceiling mounting. The vertical swivel range is +7° to -16°, while the horizontal swivel range is ±45°.

Order number **B338**

---

**Represented by:**

**North America:**

Bosch Security Systems, Inc.  
130 Perinton Parkway  
Fairport, New York, 14450, USA  
Phone: +1 800 289 0096  
Fax: +1 585 223 9180  
security.sales@us.bosch.com  
www.boschsecurity.us

**Europe, Middle East, Africa:**

Bosch Security Systems B.V.  
P.O. Box 80002  
5617 BA Eindhoven, The Netherlands  
Phone: + 31 40 2577 284  
Fax: +31 40 2577 330  
emea.securitysystems@bosch.com  
www.boschsecurity.com

**Asia-Pacific:**

Robert Bosch (SEA) Pte Ltd, Security Systems  
11 Bishan Street 21  
Singapore 573943  
Phone: +65 6571 2808  
Fax: +65 6571 2699  
apr.securitysystems@bosch.com  
www.boschsecurity.asia

**China:**

Bosch (Shanghai) Security Systems Ltd.  
203 Building, No. 333 Fuquan Road  
North IBP  
Changning District, Shanghai  
200335 China  
Phone +86 21 22181111  
Fax: +86 21 22182398  
www.boschsecurity.com.cn

**Latin America and Caribbean:**

Robert Bosch Ltda Security Systems Division  
Via Anhanguera, Km 98  
CEP 13065-900  
Campinas, Sao Paulo, Brazil  
Phone: +55 19 2103 2860  
Fax: +55 19 2103 2862  
latam.boschsecurity@bosch.com  
www.boschsecurity.com