

Blue Line Gen2 TriTech Motion Detectors

www.boschsecurity.com



BOSCH

Invented for life



- ▶ Pet-friendly Selectable model available – optimize installation for pet (45 kg [100 lb]) and non-pet applications
- ▶ Dynamic Temperature Compensation – superior catch performance in any environment
- ▶ Microwave Noise Adaptive processing – reduce false alarms from repetitive sources
- ▶ Wall to Wall Coverage – superior catch performance
- ▶ Flexible Mounting Height, No Adjustments – reduce installation time and false alarms, improve catch performance

The Blue Line Gen2 TriTech Motion Detectors (ISC-BDL2) use a combination of passive infrared (PIR) and microwave detection technologies with advanced signal processing. The pet-friendly (-WP) models generate alarms for human intruders without generating false alarms for pets. These small unobtrusive detectors are simple to install and do not need field adjustments.

Functions

First Step Processing (FSP)

First Step Processing (FSP) almost instantly responds to human targets without producing false alarms from other sources. FSP adjusts the detector's sensitivity based on signal amplitude, polarity, slope, and timing. This eliminates the need for the installer to select the sensitivity level, thus improving ease of installation and reliability.

Pet-friendly Selectivity (-WP models only)

The installer can turn pet immunity on or off based upon application requirements. When pet immunity is turned off, the detector provides superior catch performance identical to the non-pet models. When pet immunity is turned on, the detector can

distinguish between signals caused by humans and signals caused by pets. It ignores signals caused by one or two pets up to 45 kg (100 lb) or numerous rodents.

Microwave Noise Adaptive Processing

Microwave Noise Adaptive Processing adjusts to background disturbances, reducing false alarms without sacrificing intruder detection.

Dynamic Temperature Compensation

The detector intelligently adjusts its sensitivity so that it can identify human intruders at virtually any temperature.

Wall-to-Wall Coverage

An improved lookdown zone and coverage range of 12 m x 12 m (40 ft x 40 ft) provide wall-to-wall coverage.

Self-locking Enclosure

The sliding self-locking enclosure has an integrated bubble level and custom gap-free, lift-gate style terminal blocks to make installation easier.

Sealed Optics and Electronics

The optics and electronics are assembled into the front enclosure and sealed with a protective cover to prevent damage during installation. The sealed optical chamber also prevents drafts and insects from affecting the detector.

Test Features

Externally visible alarm LED can be disabled after installation.

Certifications and approvals

These detectors are also designed to comply with the following:


- Europe Complies with EN50131-2-4 Grade 2
- Complies with EN50130-5 Class II
- Complies with EN60529, EN50102 (IP30, IK04)
- Complies with Directive 2002/95/EC - Restriction of the use of certain Hazardous Substances (RoHS)
- China Complies with CCC GB10408.1 and GB10408.9

Region	Certification
	GODKJENNELSESBÆVIS [-WP6, -W12, -WP12]
Europe	CE ISC-BDL2-WP12H, ISC-BDL2-W12H
	CE ISC-BDL2-WP6G, ISC-BDL2-WP12G, ISC-BDL2-W12G
	EN50131 ISC-BDL2-W12G
	EN50131 ISC-BDL2-W12H
	EN50131 ISC-BDL2-WP12G
	EN50131 ISC-BDL2-WP12H
Belgium	INCERT ISC-BDL2-W12G, ISC-BDL2-WP12G, ISC-BDL2-WP6G
	INCERT ISC-PDL1-W18G, ISC-PDL1-WC30G, ISC-PDL1-WA18x; ISC-BDL2-WP12G
USA	UL ISC-BDL2-W12G, ISC-BDL2-WP12G, ISC-BDL2-WP6G
	UL UL 639 - Standard for Intrusion Detection Units
	FCC ISC-BDL2-W12G, ISC-BDL2-WP12G, ISC-BDL2-WP6G
Canada	ULC ULC-S306-03 - Canadian Standard for Intrusion Detection Units
	IC ISC-BDL2-W12G, ISC-BDL2-WP12G, ISC-BDL2-WP6G
France	AFNOR ISC-BDL2-W12G
	AFNOR ISC-BDL2-W12H


Region	Certification
	AFNOR ISC-BDL2-WP12G
	AFNOR ISC-BDL2-WP12H
	AFNOR ISC-BDL2-WP6G
China	CCC 2010031901000323 [-CHI]
Sweden	INTYG ISC-BDL2-W12G
	INTYG ISC-BDL2-WP12G
	INTYG ISC-BDL2-WP6G
Brazil	ANATEL ISC-BDL2-W12G, ISC-BDL2-WP12G, ISC-BDL2-WP6G
the Netherlands	NCP ISC-BPR2-W12, ISC-BPR2-WP12, ISC-BPQ2-W12, ISC-BDL2-W12G, ISC-BDL2-WP12G, ISC-BDL2-WP6G

Installation/configuration notes

Coverage Patterns

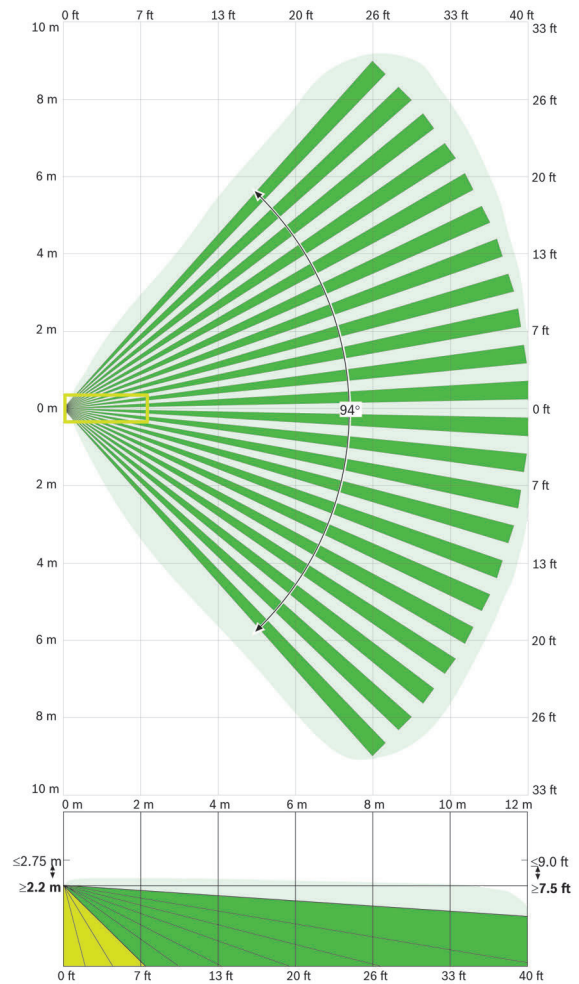

12 m x 12 m (40 ft x 40 ft) coverage

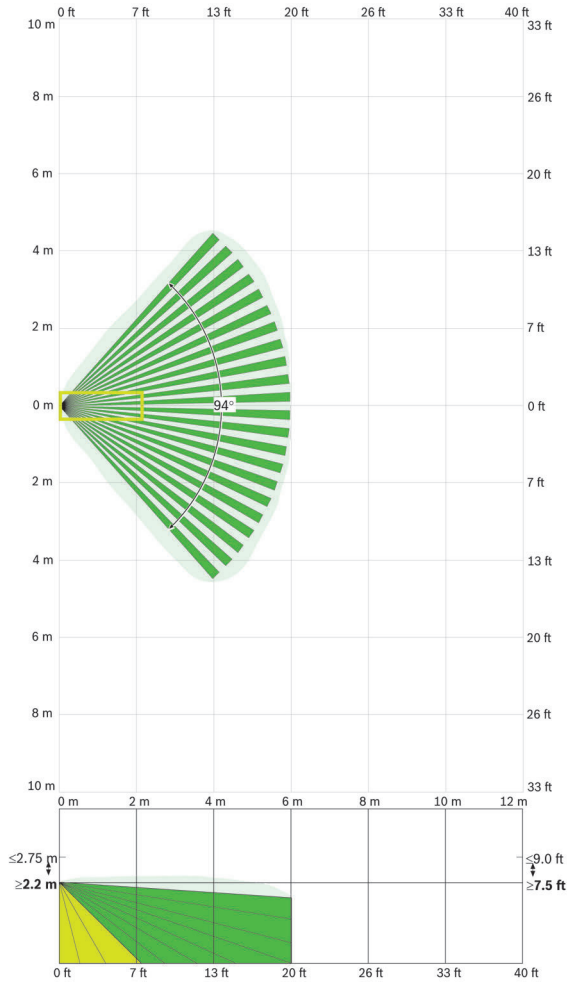

6 m x 6 m (20 ft x 20 ft) coverage (ISC-BDL2-WP6G, ISC-BDL2-WP6G-CHI)

Mounting

The recommended mounting height is 2.2 m to 2.75 m (7.5 ft to 9 ft) with no adjustments required. Mount the motion detector level, both horizontally and vertically.

Mounting options:

- On a flat wall (surface, semi-flush), with the optional B335-3 Swiveling low-profile mount, or with the optional B328 Gimbal-mount Bracket
- In a corner (the junction of two perpendicular walls)
- On the ceiling with the optional B338 Universal Ceiling-mount Bracket

Parts included

Quant.	Component
1	Detector
1	Hardware pack <ul style="list-style-type: none"> • 2 anchors (#6, #8 x 7/8) • 2 screws (#6 x 1.25) • 1 cable tie (2.5 mm)
1	Literature - Installation Guide

Technical specifications

Electrical

Current (alarm/standby):	10 mA at 12 VDC
Voltage (operating):	9 VDC to 15 VDC

Environmental

Environment	Complies with EN50130-5 Class II
Pet Immunity ¹ :	One or two pets up to 45 kg (100 lb) or numerous rodents
Relative Humidity:	0 to 95%, non-condensing <i>For UL Listed product installations, 0 to 85%, non-condensing</i>
Temperature (operating):	-30°C to +55°C (-20°F to +130°F) <i>For UL Listed product installations, 0°C to +49°C (+32°F to +120°F)</i>

¹ Applies to the Pet Friendly models only and only when the Pet Immunity feature is turned on.

Mechanical

Color:	white
Dimensions:	105 mm x 61 mm x 44 mm (4.2 in. x 2.4 in. x 1.7 in.)
Material:	High-impact ABS plastic
Radio Frequency Interference (RFI) Immunity	No alarm or setup on critical frequencies in the range from 150 kHz to 2 GHz at field strengths less than 30 V/m.

Outputs

Relay:	Solid state, supervised, Form A normally-closed (NC) contacts rated for ≤100 mA, 25 VDC, 2.5 W, <20 Ω closed
Tamper:	Normally-closed (NC) contacts (with cover on) rated for ≤100 mA, 25 VDC, 2.5 W Connect tamper circuit to 24-hour protection circuit.

Ordering information

ISC-BDL2-W12G Blue Line Gen 2 TriTech Motion Detector

Provides PIR and microwave, 12 m x 12 m (40 ft x 40 ft) coverage. Frequency: 10.525 GHz
Order number **ISC-BDL2-W12G**

B328 Gimbal-mount Bracket

Mounts on a single-gang box and allows rotation of a detector. Wires are hidden inside.
Order number **B328**

B335-3 Swiveling low-profile mount

Swiveling, low-profile, universal bracket for wall mounting. The vertical swivel range is +10° to -20°, while the horizontal swivel range is ±25°.
Order number **B335-3**

B338 Universal Ceiling-mount Bracket

Swiveling universal bracket for ceiling mounting. The vertical swivel range is +7° to -16°, while the horizontal swivel range is ±45°.

Order number **B338**

ISC-BDL2-W12H Blue Line Gen2 TriTech Motion Detector

Provides PIR and microwave, 12 m x 12 m (40 ft x 40 ft) coverage. For use in France and the United Kingdom. Frequency: 10.588 GHz

Order number **ISC-BDL2-W12H**

B328 Gimbal-mount Bracket

Mounts on a single-gang box and allows rotation of a detector. Wires are hidden inside.

Order number **B328**

B335-3 Swiveling low-profile mount

Swiveling, low-profile, universal bracket for wall mounting. The vertical swivel range is +10° to -20°, while the horizontal swivel range is ±25°.

Order number **B335-3**

B338 Universal Ceiling-mount Bracket

Swiveling universal bracket for ceiling mounting. The vertical swivel range is +7° to -16°, while the horizontal swivel range is ±45°.

Order number **B338**

ISC-BDL2-WP6G Blue Line Gen2 Pet Friendly TriTech Motion Detector

Provides Pet Friendly PIR and microwave, 6 m x 6 m (20 ft x 20 ft) coverage. Frequency: 10.525 GHz

Order number **ISC-BDL2-WP6G**

B328 Gimbal-mount Bracket

Mounts on a single-gang box and allows rotation of a detector. Wires are hidden inside.

Order number **B328**

B335-3 Swiveling low-profile mount

Swiveling, low-profile, universal bracket for wall mounting. The vertical swivel range is +10° to -20°, while the horizontal swivel range is ±25°.

Order number **B335-3**

B338 Universal Ceiling-mount Bracket

Swiveling universal bracket for ceiling mounting. The vertical swivel range is +7° to -16°, while the horizontal swivel range is ±45°.

Order number **B338**

ISC-BDL2-WP12G Blue Line Gen2 Pet Friendly TriTech Motion Detector

Provides Pet Friendly PIR and microwave, 12 m x 12 m (40 ft x 40 ft) coverage. Frequency: 10.525 GHz

Order number **ISC-BDL2-WP12G**

B328 Gimbal-mount Bracket

Mounts on a single-gang box and allows rotation of a detector. Wires are hidden inside.

Order number **B328**

B335-3 Swiveling low-profile mount

Swiveling, low-profile, universal bracket for wall mounting. The vertical swivel range is +10° to -20°, while the horizontal swivel range is ±25°.

Order number **B335-3**

B338 Universal Ceiling-mount Bracket

Swiveling universal bracket for ceiling mounting. The vertical swivel range is +7° to -16°, while the horizontal swivel range is ±45°.

Order number **B338**

ISC-BDL2-WP12H Blue Line Gen2 Pet Friendly TriTech Motion Detector

Provides Pet Friendly PIR and microwave, 12 m x 12 m (40 ft x 40 ft) coverage. For use in France and the United Kingdom. Frequency: 10.588 GHz

Order number **ISC-BDL2-WP12H**

B328 Gimbal-mount Bracket

Mounts on a single-gang box and allows rotation of a detector. Wires are hidden inside.

Order number **B328**

B335-3 Swiveling low-profile mount

Swiveling, low-profile, universal bracket for wall mounting. The vertical swivel range is +10° to -20°, while the horizontal swivel range is ±25°.

Order number **B335-3**

B338 Universal Ceiling-mount Bracket

Swiveling universal bracket for ceiling mounting. The vertical swivel range is +7° to -16°, while the horizontal swivel range is ±45°.

Order number **B338**

ISC-BDL2-WP6G-CHI Blue Line Gen2 Pet Friendly Tri-Tech Motion Detector

Provides Pet Friendly PIR and microwave, 6 m x 6 m (20 ft x 20 ft) coverage. For use in China. Frequency: 10.525 GHz

Order number **ISC-BDL2-WP6G-CHI**

ISC-BDL2-WP12G-CHI Blue Line Gen2 Pet Friendly Tri-Tech Motion Detector

Provides Pet Friendly PIR and microwave, 12 m x 12 m (40 ft x 40 ft) coverage. For use in China. Frequency: 10.525 GHz

Order number **ISC-BDL2-WP12G-CHI**

B328 Gimbal-mount Bracket

Mounts on a single-gang box and allows rotation of a detector. Wires are hidden inside.

Order number **B328**

B335-3 Swiveling low-profile mount

Swiveling, low-profile, universal bracket for wall mounting. The vertical swivel range is +10° to -20°, while the horizontal swivel range is ±25°.

Order number **B335-3**

B338 Universal Ceiling-mount Bracket

Swiveling universal bracket for ceiling mounting. The vertical swivel range is +7° to -16°, while the horizontal swivel range is ±45°.

Order number **B338**

Accessories

B328 Gimbal-mount Bracket

Mounts on a single-gang box and allows rotation of a detector. Wires are hidden inside.

Order number **B328**

B335-3 Swiveling low-profile mount

Swiveling, low-profile, universal bracket for wall mounting. The vertical swivel range is +10° to -20°, while the horizontal swivel range is ±25°.

Order number **B335-3**

B338 Universal Ceiling-mount Bracket

Swiveling universal bracket for ceiling mounting. The vertical swivel range is +7° to -16°, while the horizontal swivel range is ±45°.

Order number **B338**

Represented by:

North America:

Bosch Security Systems, Inc.
130 Perinton Parkway
Fairport, New York, 14450, USA
Phone: +1 800 289 0096
Fax: +1 585 223 9180
security.sales@us.bosch.com
www.boschsecurity.us

Europe, Middle East, Africa:

Bosch Security Systems B.V.
P.O. Box 80002
5617 BA Eindhoven, The Netherlands
Phone: + 31 40 2577 284
Fax: +31 40 2577 330
emea.securitysystems@bosch.com
www.boschsecurity.com

Asia-Pacific:

Robert Bosch (SEA) Pte Ltd, Security Systems
11 Bishan Street 21
Singapore 573943
Phone: +65 6571 2808
Fax: +65 6571 2699
apr.securitysystems@bosch.com
www.boschsecurity.asia

China:

Bosch (Shanghai) Security Systems Ltd.
203 Building, No. 333 Fuquan Road
North IBP
Changning District, Shanghai
200335 China
Phone +86 21 22181111
Fax: +86 21 22182398
www.boschsecurity.com.cn

Latin America and Caribbean:

Robert Bosch Ltda Security Systems Division
Via Anhanguera, Km 98
CEP 13065-900
Campinas, Sao Paulo, Brazil
Phone: +55 19 2103 2860
Fax: +55 19 2103 2862
latam.boschsecurity@bosch.com
www.boschsecurity.com