

RE222 Honeywell®-Compatible NanoMax™ Door/Window

Programming/Enrolling

- Place control Panel into enrollment mode
 - Remove battery tab to automatically send entire RF enrollment sequence, or
 - Using the magnet, open and close the internal switch, waiting two seconds between each transition. Repeat three times.
 - Confirm Loop 2 is selected


Installation

- The 3M VHB™ tape is an extremely effective adhesive. However it requires three things to properly bond:
 1. Clean surface - any standard cleaner will work, but surface must be dry afterwards.
 2. Warm temperature - if temperature is below 50F, warm the mounting surface by vigorously rubbing it with something clean.
 3. Pressure - apply firm pressure for 10-15 seconds.
- Remove 3M VHB™ tape backing
- Place on desired location of door or window
- External Contact: Internal magnetic switch **cannot** be used when external contact is installed. See next page for external contact mounting.

Operation

- Alarm when...
 - Magnet is pulled away from internal reed switch, or
 - External contact is opened
- Tamper Alarm, when cover is opened
- Supervisory transmission, every hour
- Low battery indication, when battery is nearing end of life

Physical	
Housing dimensions	1.8 x 0.77 x 0.39 inches
Weight with battery	0.529 ounces
Mounting fastener	3M VHB™ Tape
Tamper activation	Cover removal
Environmental	
Operating temperature	32°F to 120°F
Specifications	
Magnet trip distance	1 inch nominal
Replacement battery	Panasonic CR1632
Battery life	6 years
Strong, reliable RF signal	Maximum FCC power



Battery tab can be extracted without removing the cover

RE222 Honeywell®-Compatible NanoMax™ Door/Window

Programming/Enrolling

- Place control Panel into enrollment mode
 - Remove battery tab to automatically send entire RF enrollment sequence, or
 - Using the magnet, open and close the internal switch, waiting two seconds between each transition. Repeat three times.
 - Confirm Loop 2 is selected



Installation

- The 3M VHB™ tape is an extremely effective adhesive. However it requires three things to properly bond:
 1. Clean surface - any standard cleaner will work, but surface must be dry afterwards.
 2. Warm temperature - if temperature is below 50F, warm the mounting surface by vigorously rubbing it with something clean.
 3. Pressure - apply firm pressure for 10-15 seconds.
- Remove 3M VHB™ tape backing
- Place on desired location of door or window
- External Contact: Internal magnetic switch **cannot** be used when external contact is installed. See next page for external contact mounting.

Operation

- Alarm when...
 - Magnet is pulled away from internal reed switch, or
 - External contact is opened
- Tamper Alarm, when cover is opened
- Supervisory transmission, every hour
- Low battery indication, when battery is nearing end of life

Physical	
Housing dimensions	1.8 x 0.77 x 0.39 inches
Weight with battery	0.529 ounces
Mounting fastener	3M VHB™ Tape
Tamper activation	Cover removal
Environmental	
Operating temperature	32°F to 120°F
Specifications	
Magnet trip distance	1 inch nominal
Replacement battery	Panasonic CR1632
Battery life	6 years
Strong, reliable RF signal	Maximum FCC power

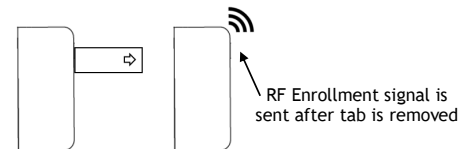

Battery tab can be extracted without removing the cover


Typical External Contact Installation

Magnet rests in drilled hole on top of door.

External contact is wired to the NanoMax™ through a hole drilled in the doorframe



Strip external contact wires to 1/4" and twist each wire.

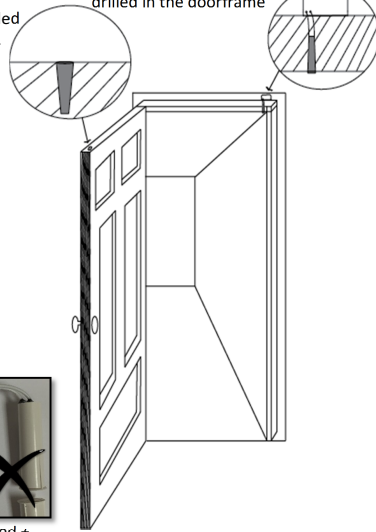

Magnetic Reed



External Contact



Magnetic Reed + External Contact

Notices

"GE", "Honeywell", "DSC", "2GIG" and "Napco" are trademarks owned by General Electric Company, Honeywell International Inc., Tyco Safety Products Canada LTD, 2GIG Technologies Inc., and NAPCO Security Systems, Inc., respectively.

Resolution Products, Inc. products will function with one of either GE, DSC, 2GIG or Honeywell systems. However, no Resolution product is produced by, endorsed by, nor is officially associated with GE, Honeywell, 2GIG or DSC. Resolution recommends verifying proper enrollment and operation, per control panel installation instructions, at installation.

Warranty

Resolution Products, Inc. will replace products that are defective in their first five (5) years.

FCC Notice

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions:
This device may not cause harmful interference.
This device must accept any interference that may be received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the Resolution Products, Inc. could void the user's authority to operate this equipment.
FCC ID: U5X-RE222

IC Notice

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions:

- (1) This device may not cause interference, and
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.


Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

- (1) l'appareil ne doit pas produire de brouillage, et
- (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.


Typical External Contact Installation

Magnet rests in drilled hole on top of door.


External contact is wired to the NanoMax™ through a hole drilled in the doorframe




Strip external contact wires to 1/4" and twist each wire.

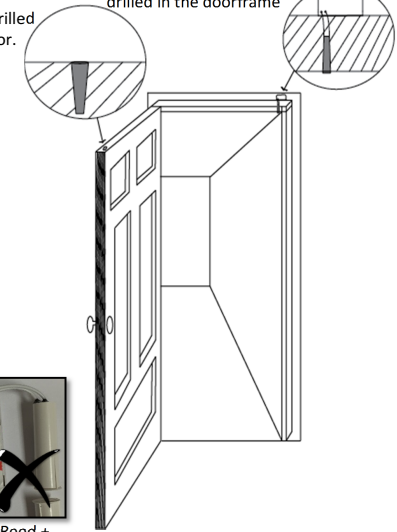

Magnetic Reed



External Contact



Magnetic Reed + External Contact

Notices

"GE", "Honeywell", "DSC", "2GIG" and "Napco" are trademarks owned by General Electric Company, Honeywell International Inc., Tyco Safety Products Canada LTD, 2GIG Technologies Inc., and NAPCO Security Systems, Inc., respectively.

Resolution Products, Inc. products will function with one of either GE, DSC, 2GIG or Honeywell systems. However, no Resolution product is produced by, endorsed by, nor is officially associated with GE, Honeywell, 2GIG or DSC. Resolution recommends verifying proper enrollment and operation, per control panel installation instructions, at installation.

Warranty

Resolution Products, Inc. will replace products that are defective in their first five (5) years.

FCC Notice

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions:
This device may not cause harmful interference.
This device must accept any interference that may be received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the Resolution Products, Inc. could void the user's authority to operate this equipment.
FCC ID: U5X-RE222

IC Notice

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions:

- (1) This device may not cause interference, and
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

- (1) l'appareil ne doit pas produire de brouillage, et
- (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.