



**SILENT  
KNIGHT**

by Honeywell

## 5860 Remote Annunciator

**Bring the power to control an IntelliKnight fire alarm control panel to every area within your facility**

Now you can operate and program your IntelliKnight system from up to twelve locations throughout your facility. The 5860 remote annunciator provides the same advanced, easy-to-use interface found on the IntelliKnight panel's built-in annunciator. The 80-character display and ergonomically designed keypad allow for simple and error-free system operation. All operations—including reset, silence, detector status checking, fire drill, and programming—are identical.

Access to the system is through a firefighter's key or an access code. For security, a special installation code is needed for programming functions. The 5860 connects to the IntelliKnight panel via the RS-485 system bus. Wire runs can be up to 6000 feet from the panel.

For more information about the IntelliKnight system, or to locate your nearest source, please call 1-800-328-0103.

### Description

Features include an 80-character backlit LCD providing easy-to-understand system messages. The annunciator is ergonomically designed with over-sized buttons for the most frequently used features, like Reset and Silence.

In addition to status messages displayed on the LCD, there are five LEDs for alarm, supervisory, trouble, silence, and AC power status.

The annunciator is available in gray to match virtually any decor and red for applications where the annunciator must stand out. The annunciator enclosure can be surface or flush mounted. A trim ring kit is available for surface mounting.

### Features

- 80-character backlit LCD display (4 lines with 20 characters on each line)
- Tactile and audible feedback
- Accepts user codes or fire fighter's key
- Larger keypad buttons for system reset and silence
- Install up to twelve 5860s per 5820XL/EVS or 5808 system
- Install up to eight 5860s per 5700 system

- Available in red or light gray
- Support for simultaneous use of multiple 5860s
- RS-485 interface to panel
- Operation and appearance is identical to 5860 built-in annunciator
- On-board piezo sounder audibly indicates alarms, troubles, and supervisories
- Five status LEDs for alarm, supervisory, trouble, silence and AC power conditions
- Wiring lengths up to 6000 ft. from the FACP (depending on wire gauge and number of devices on SBUS)
- UL listed, complies with NFPA 72
- CSFM approved

### Electrical Specifications

Operating Voltage: 24 VDC

Standby Current: 20 mA max

Alarm Current: 25 mA

Wiring Distance: 6,000 max. from FACP (depending on wire gauge and number of devices on the SBUS)

### Mechanical Specifications

Physical 9.1" W x 7.4" H x 1.5" D (23.1 W x 18.8 H x 3.8 D cm)

Shipping Weight: 2.8 lbs (1.3 kg)

Color

5860R: Red

5860: Gray



**5860**

### Environmental

Operating Temperature: 32°F – 120°F (0°C – 49°C)

Humidity: 10% – 93% non-condensing

### Compatibility

The 5860 is compatible with the following FACP's:

- 5820XL Addressable Fire Control Panel
- 5820XL-EVS Fire Control Panel with Emergency Voice System
- 5808 Addressable Fire Control Panel
- 5700 Addressable Fire Control Panel

## 5860 Remote Annunciator


### Engineering Specifications

The main control must have a built-in annunciator and must support up to 12 remote annunciators. Remote annunciators shall have the same control and display layout so as to match the appearance of the built-in annunciator. Remote annunciators shall be available in two colors, red or light gray.

Remote annunciators shall have identical functionality and operation as the built-in annunciator. All annunciators must have an 80-character LCD display and must feature five LEDs for: General Alarm, Supervisory, System Trouble, System Silence, and System Power.

All controls and programming keys are silicone mechanical type with tactile and audible feedback. Keys have a travel of .040 inches. No membrane style buttons will be permissible.

The annunciator must be able to silence and reset alarms through the use of a code entered on the annunciator keypad or by using a firefighter's key. The annunciator must have two levels of user codes that will limit the operating system programming to authorized individuals. The control panel must allow all annunciators to accommodate multiple user input simultaneously.

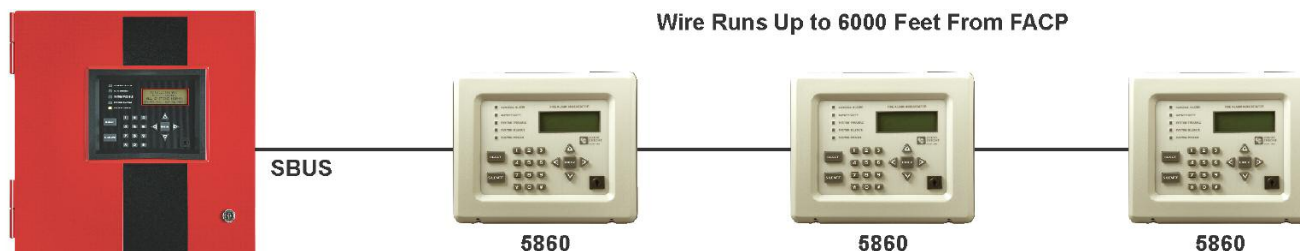

• Up to 12 5860s Per IFP-100/ECS or IFP-1000/ECS System

• Up to Eight 5860s Per 5700 System

Compatible IntelliKnight FACP

#### Listings

NFPA 72; UL Listed;  
CSFM 7170-0559: 135;  
MEA 429-92-E Vol. IX;  
FM Approved

#### Ordering Information


5860R	Remote Annunciator four line LCD annunciator with 20 characters per line. Red
5860	Remote Annunciator four line LCD annunciator with 20 characters per line. Gray

#### Accessories

5860TR	Red Trim Ring for surface mounting
5860TG	Gray Trim Ring for surface mounting



This document is not intended to be used for installation purposes. We try to keep our product information up-to-date and accurate. We cannot cover all specific applications or anticipate all requirements. All specifications are subject to change without notice. For more information, contact Silent Knight 12 Clintonville Road, Northford, CT 06472-1610. Phone: (800) 328-0103, Fax: (203) 484-7118. For Technical Support, Please call 800-446-6444.  
[www.silentknight.com](http://www.silentknight.com)



**Assembled in America**