



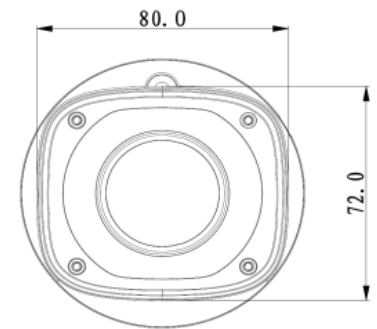


2.1MP HD IP Bullet Camera with Autofocus and IR

- 1/3" 2 Megapixel progressive CMOS
- H.264 & MJPEG dual-stream encoding
- Maximum 25/30fps at 1080P (1920x1080) & 25/30fps at 720P (1280x 720)
- Day/Night (ICR), 3DNR, AWB, AGC, BLC, WDR (120dB)
- Multiple network monitoring: Web viewer, STORM VMS
- 2.7~12mm autofocus lens
- Maximum length of IR LEDs: 30m
- IP66, PoE
- Outdoor / Indoor

Dimensions (mm)

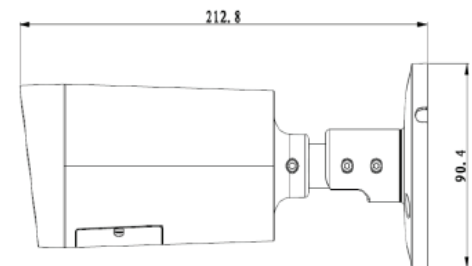

Popular Mounting Solutions

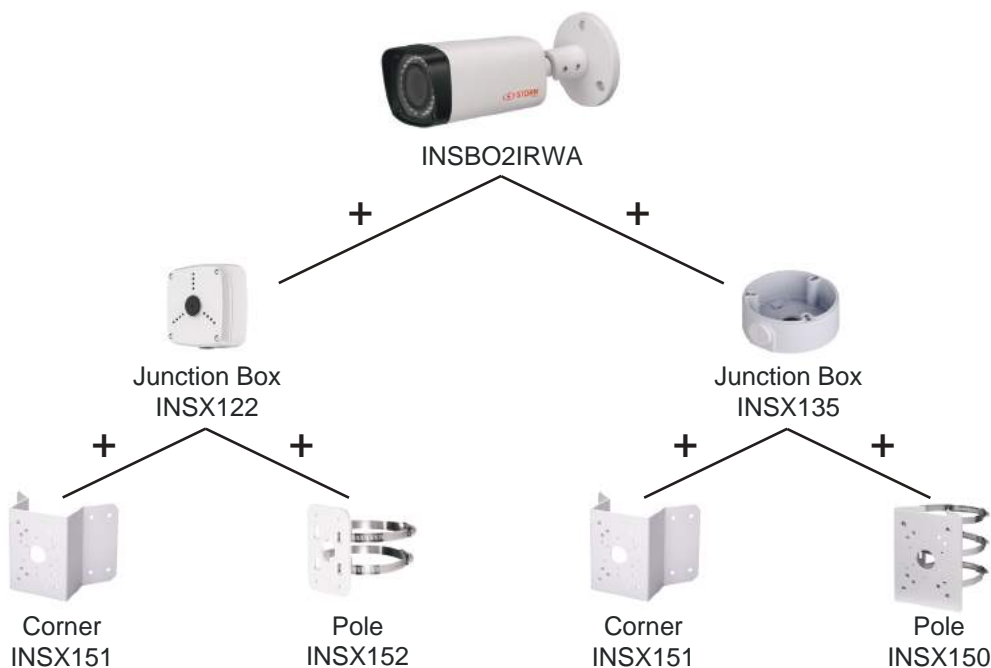

INSBO2IRWA

Product Specifications



| | | |
|---------------------------|--|----------------------|
| Camera | | |
| Image Sensor | 1/3" 2 Megapixel progressive scan Aptina CMOS | |
| Effective Pixels | 1920(H) x 1080(V) | |
| Scanning System | Progressive | |
| Electronic Shutter Speed | Auto / Manual, 1/3(4)~1/10000s | |
| Minimum Illumination | 0. 01 Lux/F1.4 (Color), 0 Lux/F1.4 (IR on) | |
| S/N Ratio | More than 50dB | |
| Video Output | N/A | |
| Camera Features | | |
| Maximum Length of IR LEDs | 30m | |
| Day/Night | Auto (ICR) / Color / B/W | |
| Backlight Compensation | BLC / HLC / WDR | |
| White Balance | Auto / Manual | |
| Gain Control | Auto / Manual | |
| Noise Reduction | 3D | |
| Privacy Masking | Up to 4 areas | |
| Lens | | |
| Focal Length | 2.7mm~12mm autofocus | |
| Maximum Aperture | F1.4 | |
| Focus Control | Auto | |
| Viewing Angle | H: 78°~ 28° | |
| Lens Type | Motorized / Fixed Iris | |
| Mount Type | Board -in Type | |
| Video | | |
| Compression | H.264 / H.264H / MJPEG | |
| Resolution | 1080P (1920x1080) / 1.3MP (1280x960) / 720P (1280x720) / D1 (704x576 / 704x480) / CIF (352x288 / 352x240) | |
| Frame Rate | Main Stream | 1080P (1 ~ 25/30fps) |
| | Sub Stream | D1/CIF (1~ 25/30fps) |
| Bit Rate | H.264 H: 40 ~ 8192 Kbps | |
| Audio | | |
| Compression | N/A | |
| Interface | N/A | |
| Network | | |
| Ethernet | RJ-45 (10/100Base -T) | |
| Wi-Fi | N/A | |
| Protocol | IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour | |
| Compatibility | ONVIF, CGI, PSIA | |
| Maximum User Access | 20 users | |

INSBO2IRWA

Product Specifications



| | |
|---------------------|--------------------------------------|
| Smart Phone | iPhone, iPad, Android, Windows Phone |
| Auxiliary Interface | |
| Memory Slot | Micro SD, Maximum 64GB |
| RS485 | N/A |
| Alarm | N/A |
| PIR Sensor Range | N/A |
| General | |
| Power Supply | DC12V /PoE (802.3af) |
| Power Consumption | Maximum 7.5W |
| Working Environment | -30°C to +60°C, Less than 95% RH |
| Ingress Protection | IP66 |
| Vandal Resistance | N/A |
| Dimensions | 72mm × 80mm × 212.8mm |
| Weight | 0.65 kg |