



4MP WDR IR Bullet Network Camera


- 1/3" 4Megapixel progressive scan CMOS
- H.265 & H.264 dual-stream encoding
- 20fps at 4MP(2688×1520) & 25/30fps at 3MP(2304×1296)
- WDR(120dB), Day/Night(ICR), 3DNR, AWB, AGC, BLC
- Multiple network monitoring: Web viewer, STORM VMS
- Micro SD card slot, up to 128GB
- 2.7mm - 13.5mm varifocal lens
- Max IR LEDs Length 60m
- IP67, PoE+



Dimensions (mm)

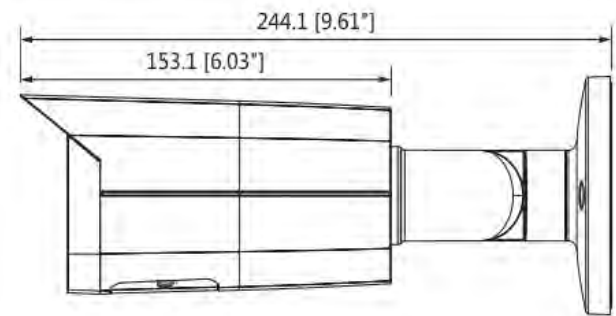



Popular Mounting Solutions



INSX130
Junction Mount



INSX152
Junction Mount

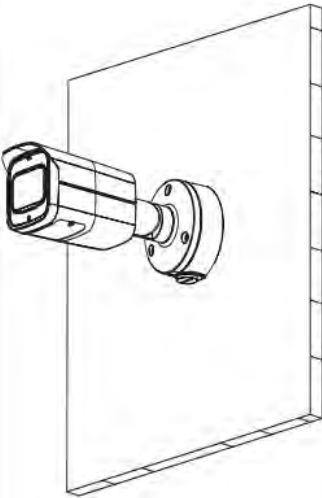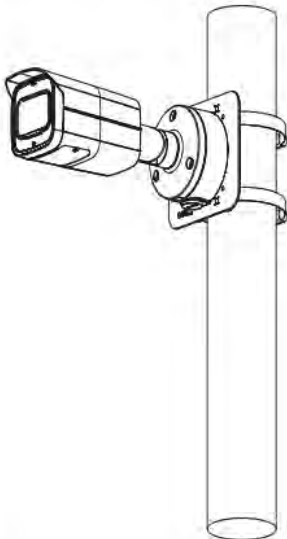Junction Mount	Pole Mount
INSX130	INSX130 + INSX152
	

Technical Specifications

Camera					
Image Sensor		1/3" 4 Megapixel progressive scan CMOS			
Effective Pixels		2688(H) x1520(V)			
RAM/ROM		512MB/32MB			
Scanning System		Progressive			
Electronic Shutter Speed		Auto/Manual, 1/3~1/100000s			
Minimum Illumination		0.03Lux/F1.4(Color,1/3s,30IRE); 0.3Lux/F1.4(Color,1/30s,30IRE); 0Lux/F1.4(IR on)			
S/N Ratio		More than 50dB			
IR Distance		Distance up to 60m(197ft)			
IR LEDs		4			
Camera Features					
Day/Night		Auto(ICR) / Color / B/W			
Backlight Compensation		BLC / HLC / WDR(120dB)			
White Balance		Auto/Natural/Street Lamp/Outdoor/Manual			
Gain Control		Auto/Manual			
Noise Reduction		3D DNR			
Digital Zoom		16x			
Privacy Masking		4 Areas			
Lens					
Lens Type		Manual			
Mount Type		Board-in			
Focal Length		2.7mm ~ 13.5mm			
Max. Aperture		F1.4			
Viewing Angle		H:104°~28°, V:72°~20°			
Close Focus Distance		0.3m			
Focus Control		Manual			
DORI Distance	Lens	Detect	Observe	Recognize	Identify
	W	64m(210ft)	26m(85ft)	13m(43ft)	6m(20ft)
	T	222m(728ft)	89m(292ft)	44m(144ft)	22m(72ft)
Video					
Compression		H.265+/H.265/H.264+/H.264/MJPEG			
Resolution		4M(2688x1520) / 3M(2304x1296) / 1080P(1920x1080) / 720P(1280x720) / VGA(640x480) / D1(704x576/704x480) / CIF(352x288/352x240)			
Frame Rate		Main Stream: 4MP(1~20fps) / 3MP(1~25/30fps)			
		Sub Stream: D1/CIF(1~25/30fps)			
Bit Rate		H.265: 12K ~ 8448Kbps; H.264: 32K ~ 10240Kbps			
Audio					
Compression		N/A			

*Design and specifications are subject to change without notice.

Technical Specifications

Intelligent Functions	
IVS	Tripwire, Intrusion
Adv. Intelligent Functions	Motion detection, Video tampering , Scene changing, Network disconnection , IP address conflict, Illegal Access, Storage anomaly
Network	
Ethernet	RJ-45 (10/100Base-T)
Protocol	HTTP;HTTPS;TCP;ARP;RTSP;RTP;RTCP;UDP;SMTP;FTP;DHCP;DNS;DDNS;PPPoE;IPV4/V6;QoS;UPnP;NTP;Bonjour;IEEE 802.1X;Multicast;ICMP;IGMP;TLS
Compatibility	ONVIF Profile S&G, API
Maximum User Access	10 Users/20 Users
Edge Storage	NAS Local PC for instant recording Micro SD Card 128GB
Smart Phone	iOS, Android
Interface	
Video Interface	N/A
Audio Interface	N/A
RS485	N/A
Alarm	N/A
General	
Power Supply	DC12V,PoE+ (IEEE 802.3at)(Class 4)
Power Consumption	<12W
Working Environment	-30° C ~ +60° C (-22° F ~ +140° F) / Less than 95% RH
Ingress Protection	IP67
Vandal Protection	N/A
Dimensions	244.1mm × 79mm × 75.9mm (9.61" × 3.11" × 2.99")

*Design and specifications are subject to change without notice.