


6x4 Basic Combo Module

364400-04

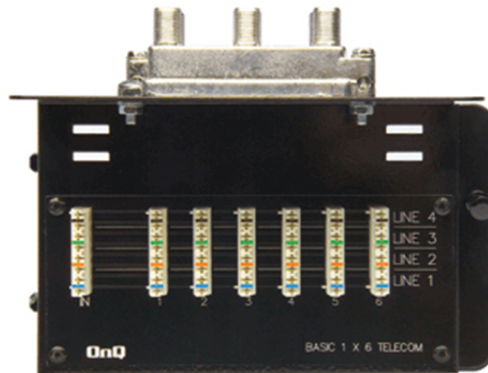

Supports telecom distribution to outlets via 110-style punchdown connections and video distribution. Does not include telecom surge protection, telecom expansion or security system interface.
5 1/8"H x 6 1/2"W

features & benefits

Compact design provides maximum space for system modules
Supports four-line telecom service distribution and video service distribution to room outlets

specifications

General Info

Color: Black
finish: Powder Coat
Type: Telecom/Video Module

Assembly/Installation Information

Mounting Hardware Included: Yes

Listing Agencies/Third Party Information

UN SPS C: 43222819

Construction Information

Installation Location: Enclosure

Dimensions

Height Metric: 13 cm
Height U S: 5.125"
Length U S: 8.3 cm
Length Metric: 3.28"
Width Metric: 16.5 cm
Width U S: 6.5 in

Cord Information

Max Insertion Loss: 5-40MHz: 6.5dB, 40-600MHz: 7dB, 600-1000MHz: 8dB
Max Return Loss: Minimum: 5-40MHz: 18dB, 40-400MHz: 20dB, 400-1000MHz: 22dB

Technical Information

Bracket Required: Mounting plate 100356-01 included
Frequency: 5-1000 MHz
Humidity: 90% Relative Humidity (Non-Condensing)
Material: 18 Gauge CRS
Mounting: Mount directly in any On-Q style enclosure
Operating Temperature Celsius: 0°C to 50°C
Operating Temperature Fahrenheit: 32°F to 122°F
Output Impedance: 75 ohms
Product Fits Into: On-Q Style Enclosure
Shape: Rectangular
Receptacle Type: 6x 110 Punchdown Telecom, 4x RG6 "F"
Number Of Receptacles: 10