

# M4315-PRO & M4320-PRO

## PROFESSIONAL HOME THEATER

Power Management with Interactive Control  
and Real Time Monitoring



### M4315-PRO and M4320-PRO

DEDICATED 15 AMP  
OR 20 AMP  
COMPONENTS



M4315-PRO  
(15 Amp)

#### FEATURES:

- Eight Fully Controllable/Programmable Outlets via RS-232C or BlueBOLT™
- Linear Filtration with Four Isolated Outlet Banks
- Two Front Panel Programmable Reboot Buttons
- IP Control with BlueBOLT-CV1 and RS-232C Cards
- Sleek New Design Including Volt/Amp Meter, Outlet Status and Warning LED's
- Removable Rack Ears (Included)

BlueBOLT™



M4320-PRO  
(20 Amp)

BlueBOLT™ Provides Web Based Remote Power Management to Monitor  
and Control Your System - From Anywhere, 24/7.

[www.panamax.com](http://www.panamax.com)

**PANAMAX**®

# M4315-PRO



# M4320-PRO

**M4320-PRO - Two 20 Amp Outlets and Six 15 Amp Outlets. 20 Amp detachable AC power cord (10 ft.).**



## M4315/4320-PRO SPECIFICATIONS

### AC Power

Line Voltage.....	120V, 60Hz
Isolated Banks.....	2
Voltage Regulation.....	No
Total Outlets.....	9 outlets
High Current Outlets.....	2 outlets
Total Current Capacity.....	M4315-PRO 15 A (1800W) - M4320-PRO 20 A (2400W)
Voltage Protection Rating (UL 1449 3rd Edition, 3,000A).....	500V
Protection Modes.....	L-N, L-G, N-G
Initial Clamping Level.....	200V Peak, 141V RMS
Energy Dissipation.....	2700 Joules
Peak Impulse Current.....	135,000 Amps
Catastrophic Surge Circuit.....	Yes
Thermal Fusing.....	Yes
Auto-resetting Over-voltage shutoff.....	134 VAC ± 2 VAC
Auto-resetting Under-voltage shutoff.....	100 VAC ± 2 VAC
EMI/RFI Noise Filtration	
Banks 1, 2, 3.....	.76db, 5KHz - 250 kHz
Bank 4, High Current Outlets.....	.46 db, 250 KHz - 1 Mhz

### LAN Protection

Clamping Level.....	60 ± 5V
Compatibility.....	10/100/1000 BASE-T
Jacks.....	RJ-45
Wires Protected.....	8-Wires

### Telco Protection

Fuseless/Auto-resetting.....	Yes
Clamping Level.....	260V
Capacitance.....	30pf (approx.)
Suppression Modes.....	Metallic & Longitudinal
Connectors.....	RJ-11
Lines Protected.....	2-Wire, Pins 4 & 5

### Universal Coax Protection

HD 1080 i/p Ready.....	Yes
Bidirectional.....	Yes
Shielded.....	Yes
Clamping Level.....	75V
Frequency Range.....	0MHz - 2.2 GHz
Insertion Loss.....	< 0.5 dB
Connectors.....	Female "F", Gold Plated

Specifications subject to change due to product upgrades and improvements..

### WARRANTIES\*

\$5,000,000 Connected Equipment Limited Lifetime Warranty • Limited 3 Year Product Warranty

\*Refer to actual warranty documentation for full details.


**Why roll a truck when you can reboot from anywhere at anytime!**

**BlueBOLT™**

Reduce service calls and lock-ups with BlueBOLT™ technology.

Online Remote Power Management for Home Theater Systems

**PROVIDES:** Secure, hosted IP system control and monitoring for the M4315-PRO & M4320-PRO.

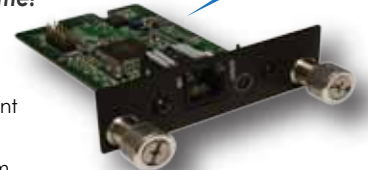

Model: BlueBOLT-CV1

(Card Included)

### WEIGHTS & MEASUREMENTS, QUANTITIES, UPC'S FOR ORDERING & SHIPPING

PRODUCT DIMENSIONS		Weight
L 12.25" x W 17" x H 1.75"		12 lbs.
19" wide with rack ears		
SINGLE UNIT CARTON		
Dimensions	Qty.	Weight
L 19.25" x W 21.25" x H 4.25"	1	17 lbs.
MASTER CARTON		
Dimensions	Qty.	Weight
L 20.25" x W 21.25" x H 10.75"	2	37 lbs.
UPC'S SINGLE UNIT CARTON		UPC'S MASTER CARTON
M4315-PRO	050616008594	M4315-PRO 50 050616008599
M4320-PRO	050616008600	M4320-PRO 50 050616008605

MODELS: M4315-PRO, M4320-PRO



**PANAMAX**

1690 Corporate Circle, Petaluma, CA. 94954 • 800-472-5555 • 707-283-5900

Fax 707-283-5901 • www.panamax.com