

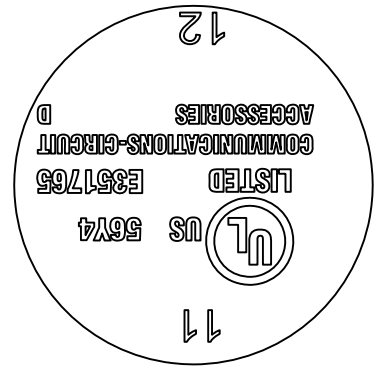
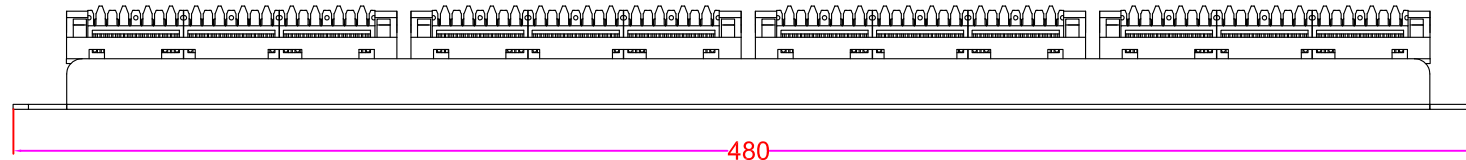


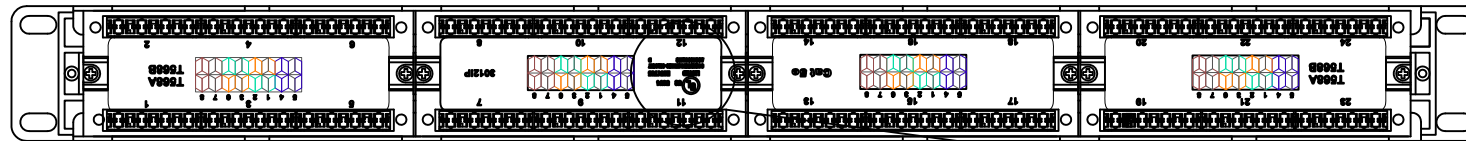



放大图纸

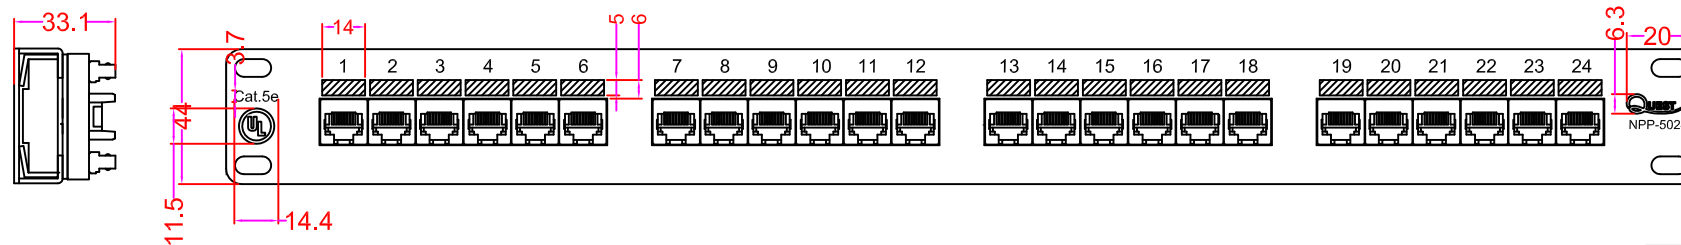

Physical Specification

Jack housing: Poly(Butylene Terephthalate) resin high-impact UL94V-2
 Spring wire: Phosphor Bronze C5210R-H, $t=0.3\text{mm}$
 50u" Gold over 70u" Nickel undercoat on contact area
 180u" Tin over 70u" Nickel undercoat on solder area
 IDC housing: Polycarbonate resin high-impact
 IDC contact: Phosphor Bronze C5191R-H, $t=0.4\text{mm}$, 200u" Tin over 60u" Nickel undercoat
 Insertion Life: 750 mating cycles with FCC compliant RJ-45 plug
 Contact force: 100 grams with FCC compliant RJ-45 plug
 Plug retention force: 11 lbf min
 Durability: 200 termination cycles
 Contact compatibility: Accommodates 22 to 26 AWG solid/24 AWG stranded
 Operating Temperature Range: -10°C to 60°C
 Storage Temperature Range: -40°C to 68°C
 Humidity: 10%~90%RH

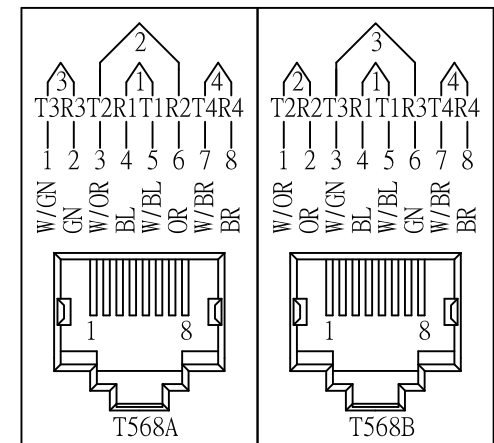

Scale	1:1	 Quest Technology Int'l, Inc 11200NW 138th st, Medley, FL33178					
3rd Angle Projection							
Unit	mm	Part no. NPP-5024X					
Date	2011.12.14	Title: 24 PORT CAT5E 110 IDC, 568A/B PATCH PANEL, UL					
Tolerance							
~20	~50	~150	150~	ALGLE	Drawn by	Checked by	Drawing No.
±0.2	±0.4	±0.5	±1.5	2°			