


33ft Polarized Reflective Photoelectric Beam Sensor

E-931-S33PRGQ Range: Up to 33ft (10m)

The E-931-S33PRGQ 33ft Polarized Reflective Photoelectric Beam Sensor provides reliable detection of shiny objects that could be missed by a non-polarized sensor.


Features:

- Polarized sensor is immune to shiny objects: triggers only when correctly reflected light is detected
- Weatherproof (IP55)
- Anti-condensation housing
- 12-30V DC/AC 60Hz, 100mA
- Up to 33ft (10m) sensing range
- Round reflector, Diameter: 3¹/₄" (82mm)
- Form C relay: 500mA@30VAC/VDC
- Beam status LED
- Compact size: 4¹³/₁₆"x2³/₈"x2⁷/₁₆" (122x60x62mm)
- N.C. Tamper switch: 500mA@30VAC/VDC
- Monitored Outputs:
 - N.C.
 - 10kΩ Resistor

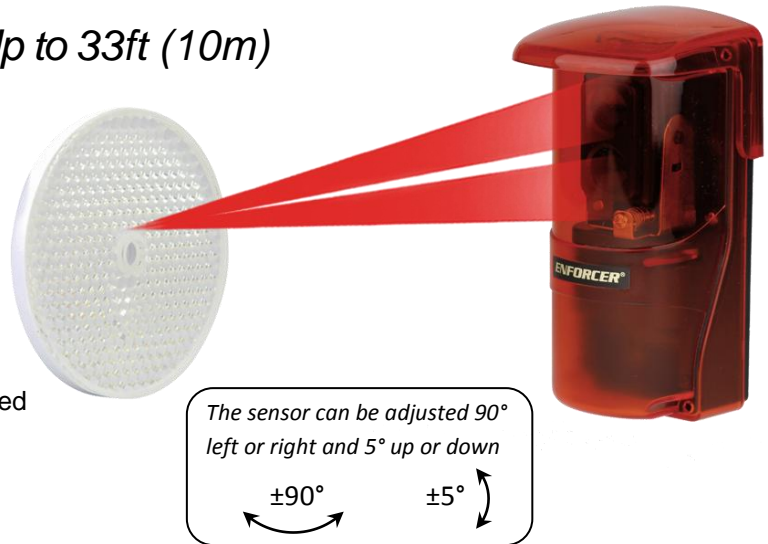


How Polarized Sensors Work:


Normal Operation

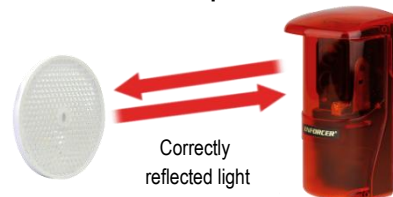

Sensor is triggered by shiny object

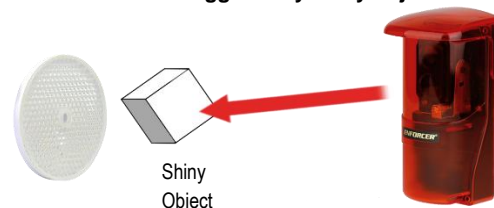

Non-polarized Sensor is NOT triggered by shiny object

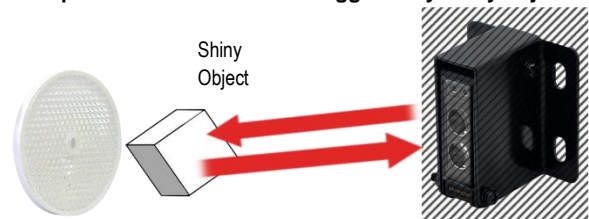

Specifications:

Model		E-931-S33PRGQ
Type		Polarized reflective photoelectric beam sensor
Sensing range		33ft (10m)
Supply voltage		12-30V DC/AC 60Hz, 100mA
Current draw	Standby	55mA@12VDC
	Active	40mA@12VDC
Response time		10ms
Light source		IR LED/Wavelength 740nm
LED	Solid green	Good beam signal, properly aligned
	Alternating Flash	Poor beam signal
	Solid red	No beam signal, triggered
Trigger output		SPDT relay output (NO/NC/COM)
Switching capacity		500mA@30VAC/VDC
Tamper switch		N.C., 500mA@30VAC/VDC
Enclosure		IP55
Operating temperature		-4°~131°F (-20°~55°C)

SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA, 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326

Website: www.seco-larm.com Email: sales@seco-larm.com



Copyright 2016 © SECO-LARM U.S.A., Inc. All rights reserved.

The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.

SECO-LARM® ENFORCER® CRIMEBUSTER® CBA SLI®

PI_E-931-S33PRGQ_160216.docx