




## M32 600lb Holding Force Magalock®

**Application** - 600 lb. holding force Magalock with automatic dual voltage. Recommended for applications where physical assault on the door is not expected, like access controlled interior rooms and secure areas within buildings.



### Features and Benefits

- Patented instant release circuit - no residual magnetism
- Surface mounts easily with a minimum of tools
- Fully sealed electronics - tamper proof and weatherproof
- Mounted using steel machine screws into blind finishing nuts
- Architectural brushed stainless steel finish (US32D/630)
- All ferrous metal surfaces plated to MIL specification
- Hardware accessories available to configure any opening type include mounting brackets, housings and dress covers
- Ten feet [3.05m] of jacketed, stranded conductor
- Also available in Senstat and Face Mount models
- **UL Listed**

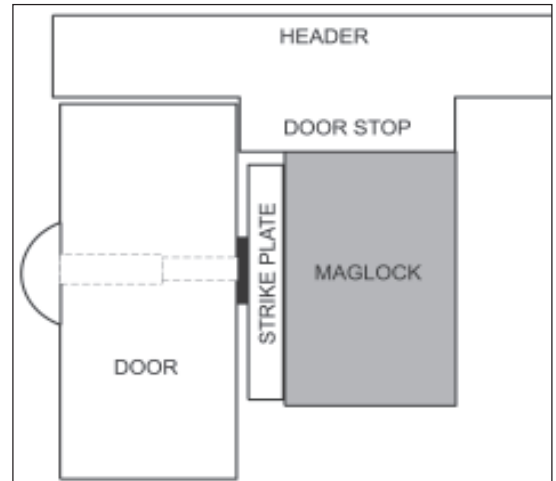

### Specification Data

**Holding Force:** 600 lbs. [272 Kg.]

**Current Draw and Voltage:**


300mA at 12VDC; 150mA at 24VDC

**Operating Temperature:**

-40 to +140F [-40 to +60]

**Warranty:** MagnaCare Lifetime

Replacement Warranty

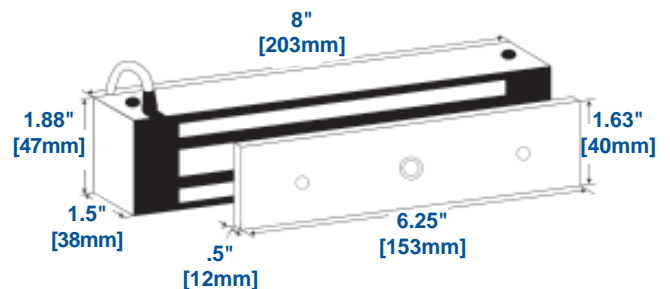

The M32 requires 2.25 inches of flat mounting space

### How To Order- 12VDC

Part #	Description
M32	Magalock Model 32
M32SC	Model 32 Senstat
M32F	Model 32 Face Mount
M32SCF	Model 32 Senstat Face Mount



See Magalock brackets and accessories for the M32 beginning on page 23

M32 Series