


# UNL

## UnLatch® Strike

### Windstorm-Rated, Preload-Handling Electromechanical Strike

The universal electromechanical UNL strike works with most North American cylindrical locksets, with or without deadlatches. The UNL supports full deadlatch function, releases under pressure and includes latch status monitoring. Strong enough to withstand windstorm conditions, the UNL provides Grade 1 holding power and is UL listed and fire-rated. Like all Securiton locks, the UNL is backed by Securiton MagnaCare—the industry's best lifetime, no fault replacement warranty.

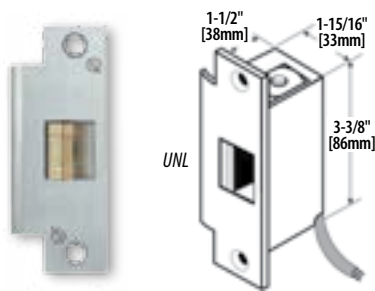

BPS-12-1 or BPS-24-1 with battery backup or an AOD33 Amp/1.5 Amp 12/24VDC power supply output recommended for startup inrush to achieve best operation when used in preload conditions

#### PRODUCT FEATURES

- No cutting or altering of the jamb required
- Releases under preload
- Supports deadlatch function
- Fits standard ANSI 4-7/8" strike cutout
- Motor driven action
- Latch status sensor included (SPDT)
- MagnaCare Lifetime Replacement No Fault Warranty

- UL listed to ANSI/SDI-BHMA A250.13 (60 PSI) Windstorm
- ANSI/BHMA A156.31, Grade 1; E09321, E09322, E09323
- ASTM-E152 fire door compliant
- Patents: 5,474,342; 6,022,056

**Holding Force:**  
1500lbs [680kg] static

**Current Draw:**  
12VDC: 40mA continuous, minimum 300mA when operating  
24VDC: 40mA continuous, minimum 200mA when operating

Higher capacity supply (1-3 Amps) is recommended for startup inrush to achieve best operation under pre-load

**Operating Temperature:**  
-20 to +125F [-29 to +52C]

**Shipping Weight:**  
1.6lbs [0.73kg]

**Finishes:**  
US26D/626 - Stainless Steel  
US10B/613 - Oil Rubbed Bronze

#### PRODUCT OPTIONS

- 12VDC
- 24VDC
- FSUNL for field-selectable fail-safe operation

#### SPECIFICATIONS

- UL 10C Listed, 3 hour single door
- CAN4-S104, CAN/ULC Listed
- NFPA-252 fire door compliant

#### MODELS

PART # | Description

|            |                                       |
|------------|---------------------------------------|
| UNL-12     | UnLatch for Cylindrical Locks - 12VDC |
| UNL-12-10B | UnLatch - 12VDC, Oil Rubbed Bronze    |
| UNL-24     | UnLatch for Cylindrical Locks - 24VDC |
| UNL-24-10B | UnLatch - 24VDC, Oil Rubbed Bronze    |

# FSUNL

## Fail Safe Unlatch® Module

### Allows Fail Safe Configuration of UNL and MUNL

The FSUNL is used with an UNL or MUNL installation to provide selectable fail safe or fail secure behavior. Removal of power initiates a full unlatch or latch cycle depending on which mode is selected.



#### MODELS

PART # | Description

|          |                                                    |
|----------|----------------------------------------------------|
| FSUNL-12 | Fail Safe/Fail Secure UnLatch Module, 12VDC, .90mA |
| FSUNL-24 | Fail Safe/Fail Secure UnLatch Module, 24VDC, 1.4mA |

These icons only apply to the UNL.



CYLINDRICAL LOCKSETS



FIRE RATED



GRADE 1



ANSI A250.13-2003 WINDSTORM RESISTANT

SECURITRON  
ASSA ABLOY