

Keystone Stainless Steel Faceplates

KEY FEATURES

- 1-2-3-4-6-8-12-port sizes
- Single- and double-gang formats
- Designs with and without labeling windows
- Brushed stainless steel – ideal for environments requiring durable and a sanitary, easy-to-clean solution
- Straight and 45-degree keystone module mounting

ORDERING INFORMATION

Single-Gang Stainless Steel Faceplates

Part Number	Description
SSKF-1	1-Port Single-Gang Stainless Steel Faceplate
SSKF-2	2-Port Single-Gang Stainless Steel Faceplate
SSKF-3	3-Port Single-Gang Stainless Steel Faceplate ❶
SSKF-4	4-Port Single-Gang Stainless Steel Faceplate
SSKF-6	6-Port Single-Gang Stainless Steel Faceplate

Single-Gang Stainless Steel Faceplates with labeling Windows

Part Number	Description
SSKFL-1	1-Port Single-Gang Stainless Steel Faceplate with Labeling Windows
SSKFL-2	2-Port Single-Gang Stainless Steel Faceplate with Labeling Windows
SSKFL-3	3-Port Single-Gang Stainless Steel Faceplate with Labeling Windows ❷
SSKFL-4	4-Port Single-Gang Stainless Steel Faceplate with Labeling Windows
SSKFL-6	6-Port Single-Gang Stainless Steel Faceplate with Labeling Windows
SSKFLA-4	4-Port Single-Gang Stainless Steel Angled Faceplate with Labeling Windows ❸

Double-Gang Stainless Steel Faceplates

Part Number	Description
DSKF-8	8-Port Double-Gang Stainless Steel Keystone Faceplate
DSKF-12	12-Port Double-Gang Stainless Steel Keystone Faceplate ❹
DSKFLA-8	8-Port Double-Gang Stainless Steel Angled Faceplate with Labeling Windows ❺

Keystone Wall-Mount Phone Plate

Part Number	Description
SSKF-1P	1-Port Stainless Steel Keystone Wall-Mount Phone Plate ❻

SPECIFICATIONS

• CONSTRUCTION

Plate: stainless steel, JIS SUS 304
(equivalent to EN 1.4301, SAE 304, UNS 30400)
Mounting posts: high impact thermoplastic, UL94V-0 fire retardant

• OVERALL DIMENSIONS

Single gang: W 69.9 mm (2.75 in) H 114.3 mm (4.50 in)
Double gang: W 116.8 mm (4.60 in) H 114.3 mm (4.50 in)

• MOUNTING DIMENSIONS


Mounting screw holes distance: 83.3 mm (3.28 in)

• KEYSTONE MODULE MOUNTING DIMENSIONS

Mounting dimensions: standard keystone footprint
Panel opening: W 14.7 mm (0.579 in) H 19.30 mm (0.760 in)

• ENVIRONMENTAL

Operating temperature: -10 °C – +60 °C (-14 °F – 140 °F)

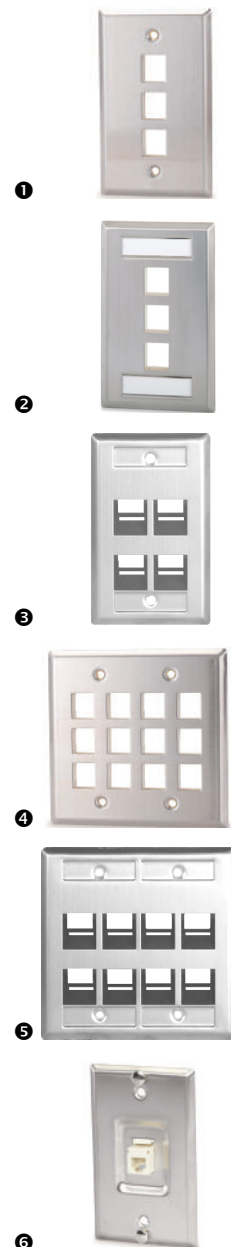

SPECIFICATIONS