

XMS

Exit Motion Sensor

Versatile Motion Detection for Hands-Free Exit Request

The XMS Passive Infrared motion sensor reliably detects motion near a door and releases its magnetic lock. Versatile mounting options and an easily adjustable infrared beam pattern provide optimal coverage of the egress area for smooth, hands-free lock release and exit.




PRODUCT FEATURES

- Passive Infrared Request to Exit Device
- Automatically and reliably cuts power to the lock with no human intervention
- Request to exit (REX) output
- Easily adjustable beam pattern
- Adjustable time relock
- MagnaCare Lifetime Replacement No Fault Warranty


SPECIFICATIONS

- ANSI/UL 294 Listed
- Dimensions:**
7"L x 1-7/8"W x 1-3/4"H
Indoor use only
- Electrical:**
20mA-50mA (depending on switching status) at 12VDC or 24VDC
- Shipping Weight:**
0.5lbs [0.23kg]

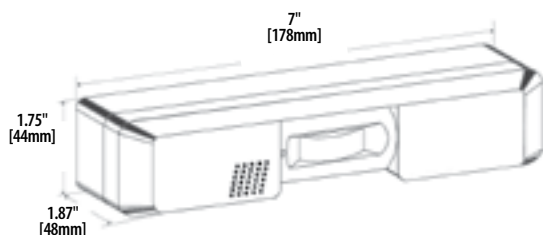

» MODELS

PART #	Description
XMS	Exit Motion Sensor

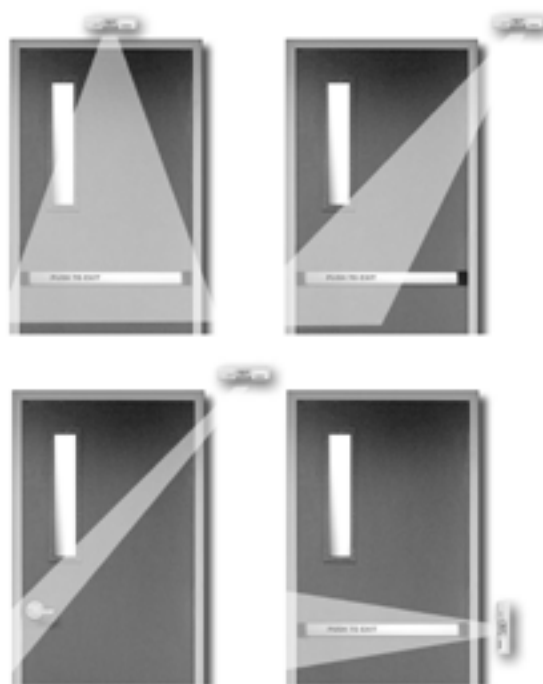

Safety Note: Securitron recommends that an emergency exit button, such as the EEB, be used in conjunction with the XMS to meet applicable building codes and specific life safety issues.

