



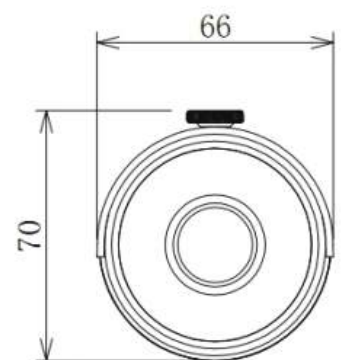


2.1MP IP Bullet Camera with IR

- 1/3" 2 Megapixel progressive scan CMOS
- H.264 & MJPEG dual-stream encoding
- Maximum 25/30fps at 1080P (1920× 1080)
- DWDR, Day/Night (ICR), AWB, AGC, BLC
- Multiple network monitoring: Web viewer, STORM VMS
- 3.6mm fixed lens
- Maximum length of IR LEDs: 30m
- IP66, PoE
- Outdoor / Indoor
- 10 pack optional (model number 10PK-INSBO2IRF)

Dimensions (mm)

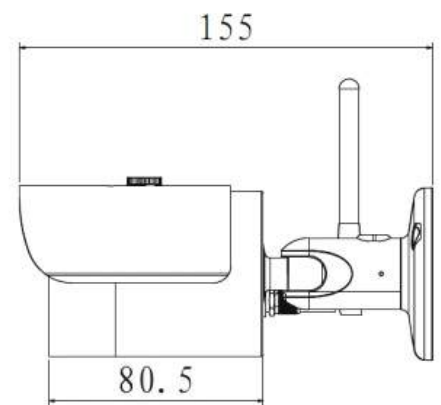

Popular Mounting Solutions

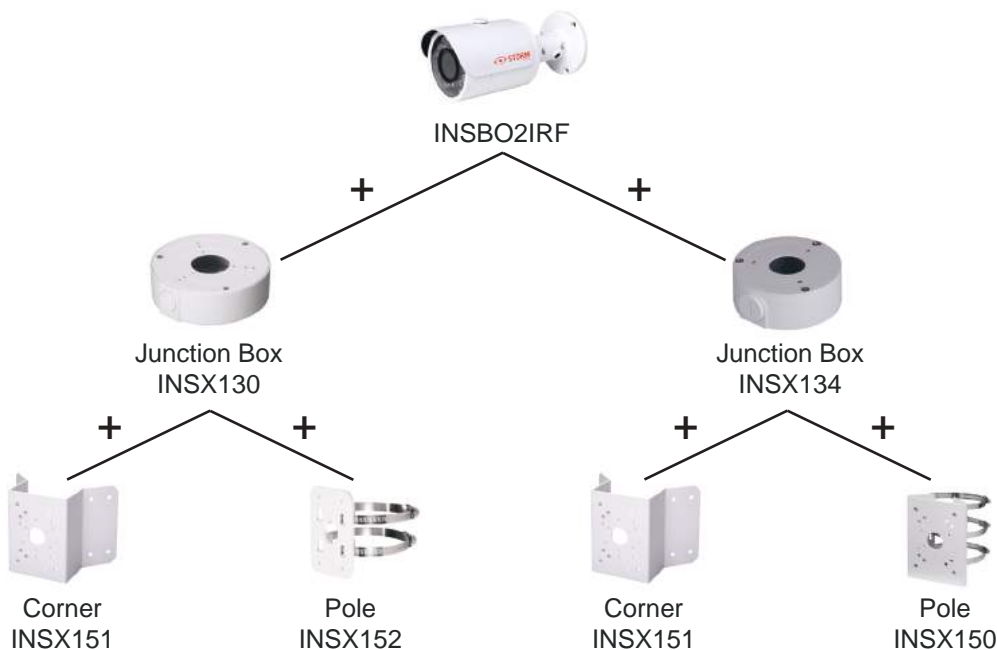

INSBO2IRF

Product Specifications



Image Sensor	1/3" 2 Megapixel progressive scan CMOS	
Effective Pixels	2048(H) x 1536(V)	
Scanning System	Progressive	
Electronic Shutter Speed	Auto / Manual 1/3 (4)~1/10000	
Minimum Illumination	Color : 0.1Lux/F1.6;0 Lux/F1.6 (IR on)	
S/N Ratio	More than 50dB	
Video Output	N/A	
Camera Features		
Maximum Length of IR LEDs	30m	
Day/Night	Auto (ICR) / Color / B/W	
Backlight Compensation	BLC / HLC / DWDR	
White Balance	Auto / Manual	
Gain Control	Auto / Manual	
Noise Reduction	2D	
Privacy Masking	Up to 4 areas	
Lens		
Focal Length	3.6mm	
Maximum Aperture	F1.6	
Focus Control	Manual	
Viewing Angle	H: 71.9°	
Lens Type	Fixed lens	
Mount Type	Board -in Type	
Video		
Compression	H.264 H / H.264B / H.264 / MJPEG	
Resolution	1080P (1920×1080) / 720P (1280×720) / D1 (704×576 / 704×480) / CIF (352×288 / 352×240)	
Frame Rate	Main Stream	1080P (1~ 25/30fps)
	Sub Stream	D1/CIF (1~ 25/30fps)
Bit Rate	H.264 H: 16K ~ 8192 Kbps	
Audio		
Compression	N/A	
Interface	N/A	
Network		
Ethernet	RJ-45 (10/100Base-T)	
Wi-Fi	N/A	
Protocol	IPv4/IPv6, HTTP, HTTPS, TCP/IP, UDP, UPnP, ICMP, IGMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS	
Compatibility	ONVIF, CGI	
Maximum User Access	20 users	
Smart Phone	iPhone, iPad, Android, Windows, Phone	

INSBO2IRF

Product Specifications



Auxiliary Interface	
Memory Slot	N/A
RS485	N/A
Alarm	N/A
PIR Sensor Range	N/A
General	
Power Supply	DC12V, PoE (802.3af)
Power Consumption	Maximum 4W
Working Environment	-30°C to +60°C, Less than 95% RH
Ingress Protection	IP66
Vandal Resistance	N/A
Dimensions	Φ70mm × 66mm × 155mm
Weight	0.42 Kg