Access

600-lb Electromagnetic Locks



E-941SA-600

UL Listed

E-941SA-600PO

With bond sensor, status LED, UL listed

Features:

- 600-lb Holding force
- Anodized aluminum housing (US 28)
- Selectable 12/24 VDC operation
- No residual magnetism
- MOV surge protection
- Adjustable mounting bracket
- Complete mounting hardware for typical installations
- "L" and "Z" brackets available for easy mounting
- Detachable faceplate

E-941SA-600PQ Only:


• Built-in dual-colored status LED and bond sensor to indicate locking status


Green	Door is closed and locked		
Red	Door is not closed and/or locked		
Off	Door in use / No power		

Bond sensor relay rated 3A@12VDC


(€ c(UL) us SECO-LARM E-941SA-600 shown


Dimensions:

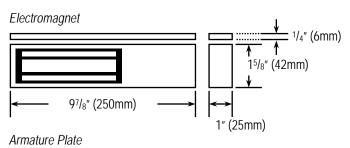




Also Available from **SECO-LARM**[®]:







Specifications:

Model		E-941SA-600	E-941SA-600PQ
Holding force		600-lb (272kg)	
Operating voltage		12/24 VDC ± 10%	
Current draw	12VDC	500mA@12VDC	
	24VDC	250mA@24VDC	
Operating temperature		14°~131° F (-10°~55° C)	
Weight		4-lb, 6-oz (2kg)	
Bond sensor relay			✓
Status LED			✓

SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA, 92606 Tel (CA & Int'l): (949) 261-2999 | (800) 662-0800

Website: www.seco-larm.com | Email: sales@seco-larm.com

