

## HITACHI Inspire the Next

### Product Highlights

- REACH & RoHS compliant
- Low Smoke CMP construction
- Guaranteed minimum performance
- Tested from 1 to 555 MHz
- UL Verified Category 6
- No internal pair separator
- Small outside diameter permits more cables per conduit than typical Category 6 cable
- Standard Reelx package made with 100% post consumer materials.

### Packaging

- 1,000 foot (305m) reels
- 1,000 foot (305m) Reelx (featuring reverse sequential numbering)
- 1,000 foot (305m) Reel-in-a-Box

### Applications

- Including:
  - HDBase-T
  - 10G BASE-T 10 Gigabit Ethernet (limited distance)
  - 1000 BASE-T Gigabit Ethernet
  - 1000 Mbps ATM
  - 622 Mbps ATM
  - 100 BASE-T Ethernet
  - Broadband Video
  - POE
  - POE+

### Temp Range

- Storage Temperature  
-40C to +60C (-40F to +140F)
- Installation Temperature  
0C to +60C (+32F to +140F)
- Operation Temperature  
-20C to +50C (-4F to +122F)

## ECO™ (Plenum)

(c(UL)us Listed Type CMP, CSA Type FT6)

HITACHI PART NO.	NO. OF PAIRS	CALCULATED CABLE O.D. in.	mm	CABLE WEIGHT lbs/1000ft	kg/305m
30237-8	4	.19	4.87	25.24	11.45


## ECO™ (Riser)

(c(UL)us Listed Type CMR, CSA Type FT4)

HITACHI PART NO.	NO. OF PAIRS	CALCULATED CABLE O.D. in.	mm	CABLE WEIGHT lbs/1000ft	kg/305m
30238-8	4	.21	5.48	23.12	10.5

To build a complete part number, visit page 102.

## Features

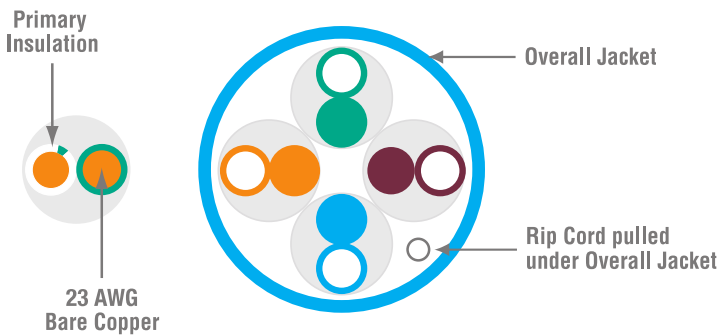

### PAIR DETAIL

DIELECTRIC MATERIALS	RISER	PLENUM
Primary Insulation	Polyolefin	Plenum-rated fluoropolymer
Overall Jacket	Flame-retardant thermoplastic	Low-smoke, flame-retardant thermoplastic

Hitachi Cable America reserves the right to revise any specifications.

# UTP Category 6

UTP Copper

## Electrical Characteristics

Input Impedance	100 ± 15Ω (1.0 to 100 MHz) 100 ± 20Ω (101 to 250 MHz)
Maximum resistance unbalance	5%
Maximum capacitance unbalance	330 pF/100 meters
Maximum delay skew	45 ns/100 meters
Nominal velocity of propagation (NVP)	riser, 68% plenum, 70%
Voltage Rating	300 Volts

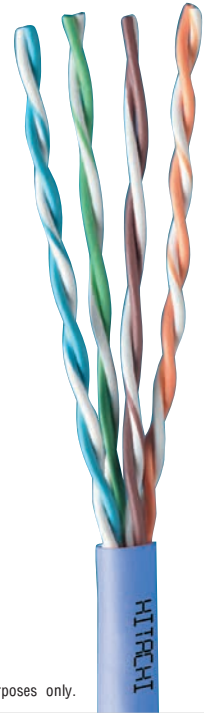


Photo is for representation purposes only.

## Transmission Specifications

ANSI/TIA 568-C.2 Category 6 Verified

ISO/IEC 11801, 2nd ed. Class E Compliant

Freq. (MHz)	Ins. Loss		NEXT		PSNEXT		ACR		PSACR		ACRF		PSACRF		Return Loss	
	Std.	Max.	Std.	Min.	Std.	Min.	Cal.	Min.	Cal.	Min.	Std.	Min.	Std.	Min.	Std.	Min.
1	2.0	2.0	74.3	74.3	72.3	72.3	72.3	72.3	70.3	70.3	67.8	67.8	64.8	64.8	20.0	20.0
4	3.8	3.8	65.3	65.3	63.3	63.3	61.5	61.5	59.5	59.5	55.8	55.8	52.8	52.8	23.0	23.0
8	5.3	5.3	60.8	60.8	58.8	58.8	55.4	55.4	53.4	53.4	49.7	49.7	46.7	46.7	24.5	24.5
10	6.0	6.0	59.3	59.3	57.3	57.3	53.3	53.3	51.3	51.3	47.8	47.8	44.8	44.8	25.0	25.0
16	7.6	7.6	56.2	56.2	54.2	54.2	48.7	48.7	46.7	46.7	43.7	43.7	40.7	40.7	25.0	25.0
31.25	10.7	10.7	51.9	51.9	49.9	49.9	41.2	41.2	39.2	39.2	37.9	37.9	34.9	34.9	23.6	23.6
62.5	15.4	15.4	47.4	47.4	45.4	45.4	32.0	32.0	30.0	30.0	31.9	31.9	28.9	28.9	21.5	21.5
100	19.8	19.8	44.3	44.3	42.3	42.3	24.5	24.5	22.5	22.5	27.8	27.8	24.8	24.8	20.1	20.1
200	29.0	29.0	39.8	39.8	37.8	37.8	10.8	10.8	8.8	8.8	21.8	21.8	18.8	18.8	18.0	18.0
250	32.8	32.8	38.3	38.3	36.3	36.3	5.5	5.5	3.5	3.5	19.8	19.8	16.8	16.8	17.3	17.3
300*	-	36.4	-	37.1	-	35.1	-	-	-	-	-	18.3	-	15.3	-	16.8
350*	-	39.8	-	36.1	-	34.1	-	-	-	-	-	16.9	-	13.9	-	16.3
400*	-	43.0	-	35.3	-	33.3	-	-	-	-	-	15.8	-	12.8	-	15.9
500*	-	48.9	-	33.8	-	31.8	-	-	-	-	-	13.8	-	10.8	-	15.2
555*	-	52.0	-	33.1	-	31.1	-	-	-	-	-	12.9	-	9.9	-	14.9

\*Frequencies beyond the TIA and ISO requirements are for information only.  
All values are dB/100m.