



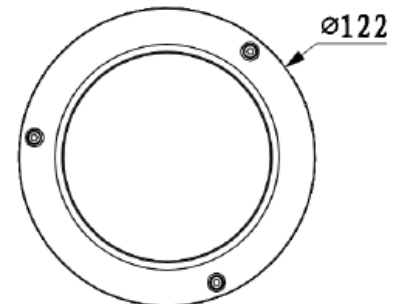


2.1MP HD IP Dome Camera with Autofocus and IR

- 1/3" 2 Megapixel progressive scan Aptina CMOS
- H.264 & MJPEG dual-stream encoding
- 25/30fps at 1080P (1920x1080) & 25/30fps at 720P (1280x 720)
- Day/Night (ICR), 3DNR, AWB, AGC, BLC, WDR (120dB)
- Multiple network monitoring: Web viewer, STORM VMS
- 2.7~12mm autofocus lens
- Maximum length of IR LEDs: 20m
- IP66, IK10, PoE
- Outdoor / Indoor

Dimensions (mm)

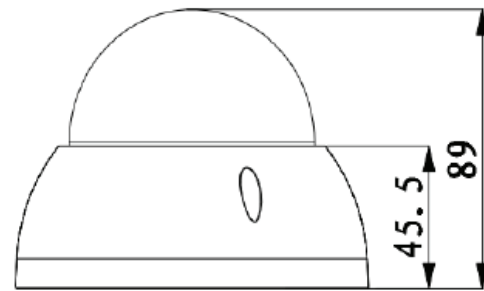

Popular Mounting Solutions

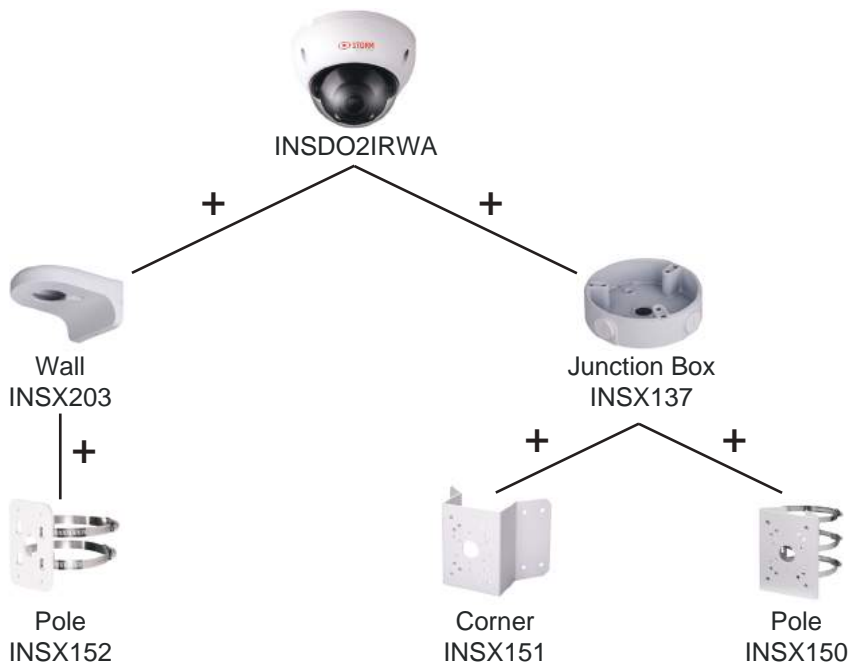

INSDO2IRWA

Product Specifications



Camera		
Image Sensor	1/3" 2 Megapixel progressive scan Aptina CMOS	
Effective Pixels	1920(H) x 1080(V)	
Scanning System	Progressive	
Electronic Shutter Speed	Auto / Manual, 1/3(4)~1/10000s	
Minimum Illumination	0.01 Lux/F1.4 (Color); 0 Lux/F1.4 (IR on)	
S/N Ratio	More than 50dB	
Camera Features		
Maximum length of IR LEDs	20m	
Day/Night	Auto (ICR) / Color / B/W	
Backlight Compensation	BLC / HLC / WDR	
White Balance	Auto / Manual	
Gain Control	Auto / Manual	
Noise Reduction	3D	
Privacy Masking	Up to 4 areas	
Lens		
Focal Length	2.7mm~12mm autofocus	
Maximum Aperture	F1.4	
Focus Control	Auto	
Viewing Angle	H: 82°~28°	
Lens Type	Motorized / Fixed Iris	
Video		
Compression	H.264 / H.264H / H.264B / MJPEG	
Resolution	1080P (1920x1080) / 1.3MP (1280x960 / 720P (1280x720) / D1 (704x576 / 704x480) / CIF (352x288 / 352x240)	
Frame Rate	Main Stream	1080P / 720P (1 ~ 25/30fps)
	Sub Stream	D1/CIF (1 ~ 25/30fps)
Bit Rate	H.264: 40K ~ 8192Mbps	
Network		
Ethernet	RJ-45 (10/100Base -T)	
Protocol	IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour	
Compatibility	ONVIF ,PSIA,CGI	
Maximum User Access	20 users	
Smart Phone	iPhone, iPad, Android, Windows Phone	
Auxiliary Interface		
Memory Slot	Micro SD, Maximum 128GB	
General		
Power Supply	DC12V, PoE (802.3af); Less than 7.5W consumption	
Working Environment	-30°C to +60°C, Less than 95% RH	
Ingress Protection	IP66, IK10 Vandal Resistance	
Dimensions / Weight	122mm x 89mm / 0.5 kg	